
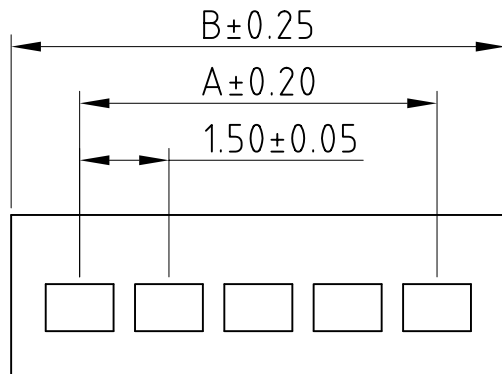



P.C.B LAYOUT

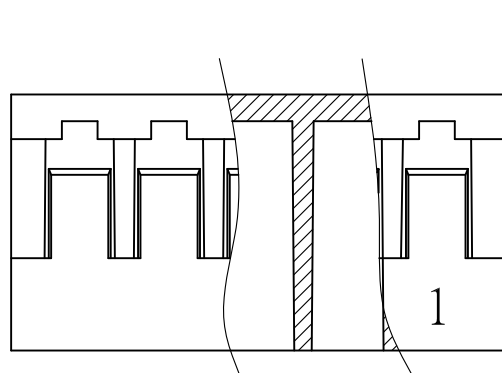

Specification

Pitch Between Poles: 1.50mm
 Current Rating: 1A AC/DC
 Voltage Rating: 50V AC/DC
 Withstand Voltage: 500V AC/Minute
 Insulation Resistance: 500M Ω MIN.
 Temperature Range: -25°C To +85°C
 Applicable Wire : AWG#26 To #30

Features

Available Number of Circuits: 02 To 15
 Material: Nylon 66 UL 94V-0

Circuits	Part No.	DIM:(mm)		Circuits	Part No.	DIM:(mm)	
		A	B			A	B
2	SZN-H-02	1.50	3.80	9	SZN-H-09	12.00	14.30
3	SZN-H-03	3.00	5.30	10	SZN-H-10	13.50	15.80
4	SZN-H-04	4.50	6.80	11	SZN-H-11	15.00	17.30
5	SZN-H-05	6.00	8.30	12	SZN-H-12	16.50	18.80
6	SZN-H-06	7.50	9.80	13	SZN-H-13	18.00	20.30
7	SZN-H-07	9.00	11.30	14	SZN-H-14	19.50	21.80
8	SZN-H-08	10.50	12.80	15	SZN-H-15	21.00	23.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

SZN-H-xx-LF
 SERIES | LEADFREE
 02~15WAY
 HOUSING

DESCRIPTION: 1.50mm PITCH BOARD TO BOARD CONNECTOR 180°