


Recommended P.C.Board Layout





Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must meet Greenconn requirement for environment protection

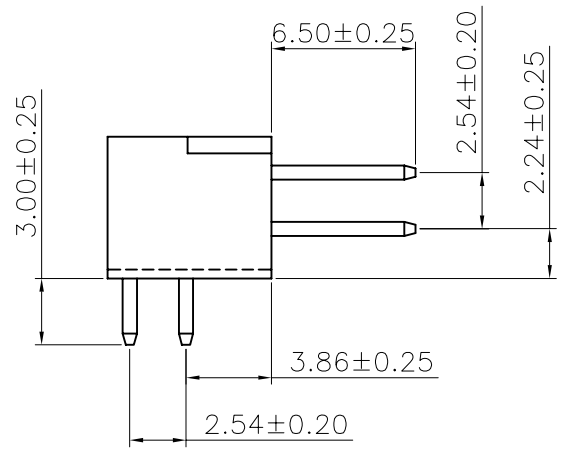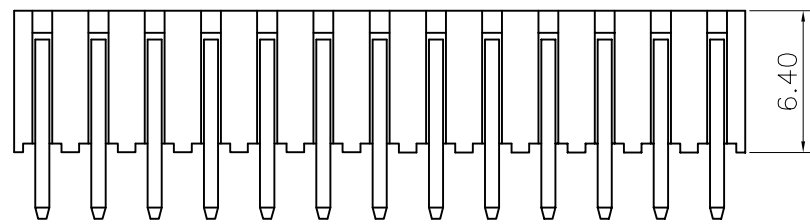

T-R746530-xx-LF
 LEADFREE
 RoHS Compliant



PART NO. T-R746530-xx

DWG NO. T-R746530-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

2.54 PIN HEADER
 DUAL ROWS R/A TYPE CONNECTOR

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ± 0.1
 .XXX ±

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AWG