

SPECIFICATIONS

Body Material: Polyamide 66(UL94V-0).Black

Terminals: Tin Plated Brass

Screw: M3.5 Nickel Plated Steel




Wier Range:14~18 AWG

Rated: 15 Amperes.AC250V

Cover: PC Transparent

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

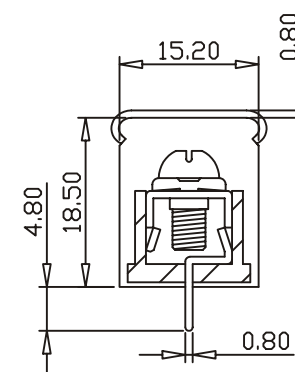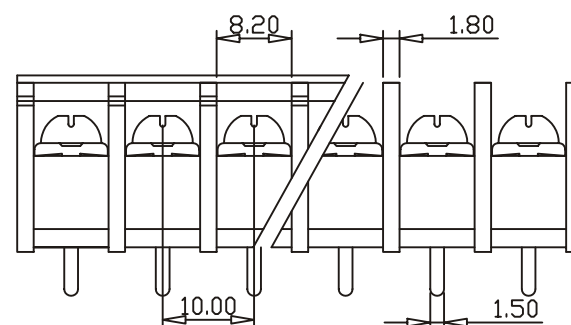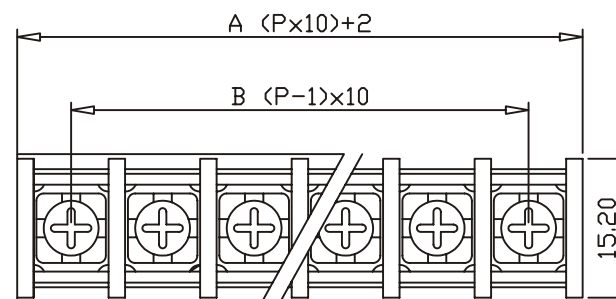

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	22	32	42	52	62	72	82	92	102	112	122	132	142	152			
B	10	20	30	40	50	60	70	80	90	100	110	120	130	140			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	162	172	182	192	202	212	222	232	242	252	262	272	282	292	302	312	322
B	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

TBB100-Dx-xx-LF

SERIES

LEADFREE

02~32WAY

BLANK:W/O COVER

C:W/COVER

DIP 180°

DESCRIPTION: