

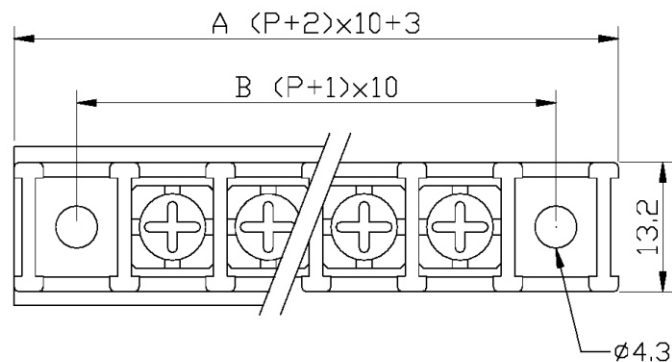


**SPECIFICATIONS**  
**BARRIER MATERIAL:** THERMOPLASTIC (UL 94V-0).BLACK  
**TERMINALS:** TIN PLATED BRASS  
**SCREW:** NICKEL PLATED STEEL  
**WIRE RANGE:** 12-22 STR  
**RATING:** 22 AMPERES.300 VAC  
**COVER MATERIAL:** PC  
**INSULATION WITHSTANDS VOLTAGE AC 2000V**  
**INSULATION RESISTANCE 500M OR MORE AT DC 500V**

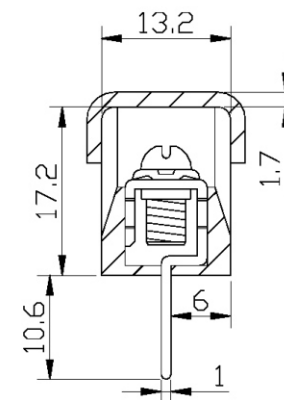

TBB100-SEC-xx-LF  
 LEADFREE  
 BLANK:NON/COVER  
 C:WITH/COVER

RoHS Compliant

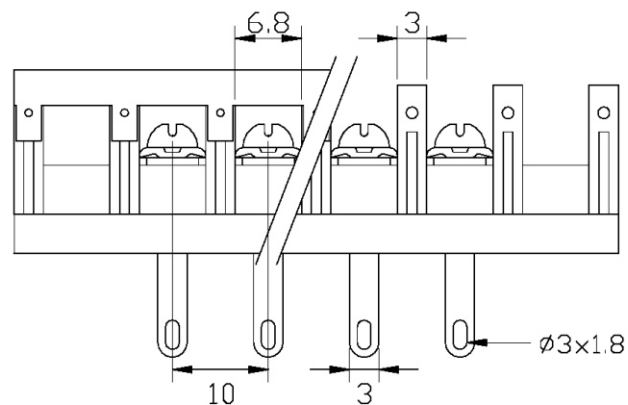

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	43	53	63	73	83	93	103	113	123	133	143	153	163	173
B	30	40	50	60	70	80	90	100	110	120	130	140	150	160
POLE	16	17	18	19	20	21	22	23	24	25				
A	183	193	203	213	223	233	243	253	263	273				
B	170	180	190	200	210	220	230	240	250	260				

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

PART NO. TBB100-SE-xx

DWG NO. TBB100-SE-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
 .XX ±  
 .XXX ±  
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司