


Section A-A

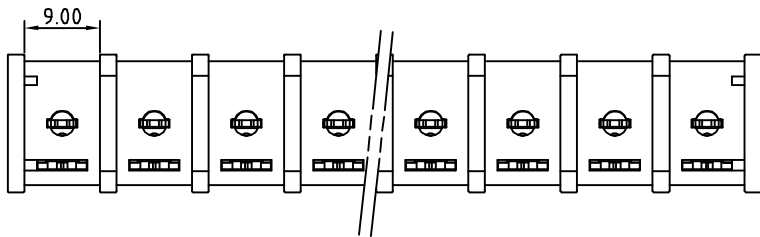

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 30 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 SCREW TORQUE VALUE: 15 Kgf.cm
 WIRE RANGE: 22 - 10AWG
 1) BODY: THERMOPLASTICS, UL94-V0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS WITH WASHER: STEEL, Ni PLATED, M4.0
 APPROVAL:

| | | | | | | | | | | | | | | | | | |
|------|--|---------|-----|-----|-----|-----|-----|-----|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| POLE | | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | |
| A | | 24 | 35 | 46 | 57 | 68 | 79 | 90 | 101 | 112 | 123 | 134 | 145 | 156 | 167 | 178 | |
| B | | 11 | 22 | 33 | 44 | 55 | 66 | 77 | 88 | 99 | 110 | 121 | 132 | 143 | 154 | 165 | |
| TOL | | +/-0.10 | | | | | | | +/-0.20 | | | | | | | | |
| POLE | | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
| A | | 189 | 200 | 211 | 222 | 233 | 244 | 255 | 266 | 277 | 288 | 299 | 310 | 321 | 332 | 343 | 354 |
| B | | 176 | 187 | 198 | 209 | 220 | 231 | 242 | 253 | 264 | 275 | 286 | 297 | 308 | 319 | 330 | 341 |
| TOL | | +/-0.30 | | | | | | | +/-0.40 | | | | | | | | |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

TBB110-D-xx-LF
 SERIES | LEADFREE
 02-32 WAY
 DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: