


SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Cover: PC Transparent

Screws Torque: 15.7 In-Lb
Wier Range: 10~18 AWG
Rated: 22 Amperes.AC300V
Pperation Temperature: -55°C~+105°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000Ω or more at DC500V

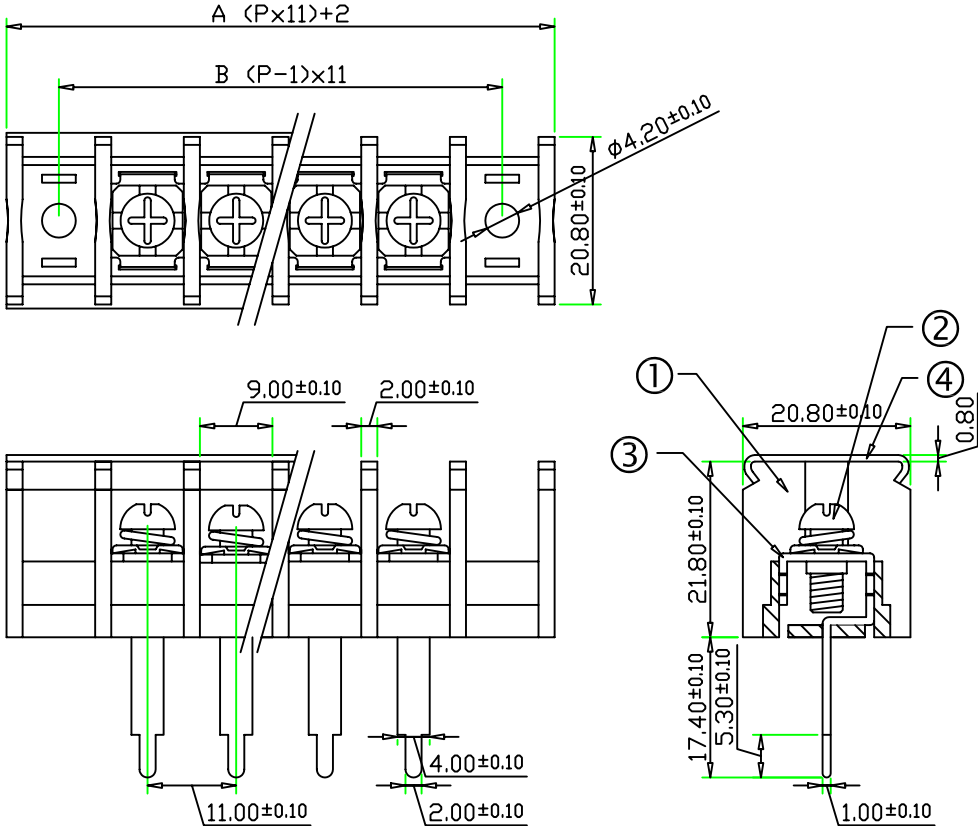

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	46	57	68	79	90	101	112	123	134	145	156	167	178	189
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176
POLE	16	17	18	19	20	21	22	23						
A	200	211	222	233	244	255	266	277						
B	187	198	209	220	231	242	253	264						

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBB110-D17EC-xx-LF

SERIES

LEADFREE
02-23 WAY
COVER
EAR
DIP LONG 17.40mm

DESCRIPTION: