


SPECIFICATIONS

- ① Housing Material: PBT (UL94V-0), Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 15.7 In-Lb
Wire Range: 10~18 AWG
Rated: 35 Amperes.AC300V $\triangle$
Operation Temperature: -55°C~+105°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000M Ω or more at DC500V

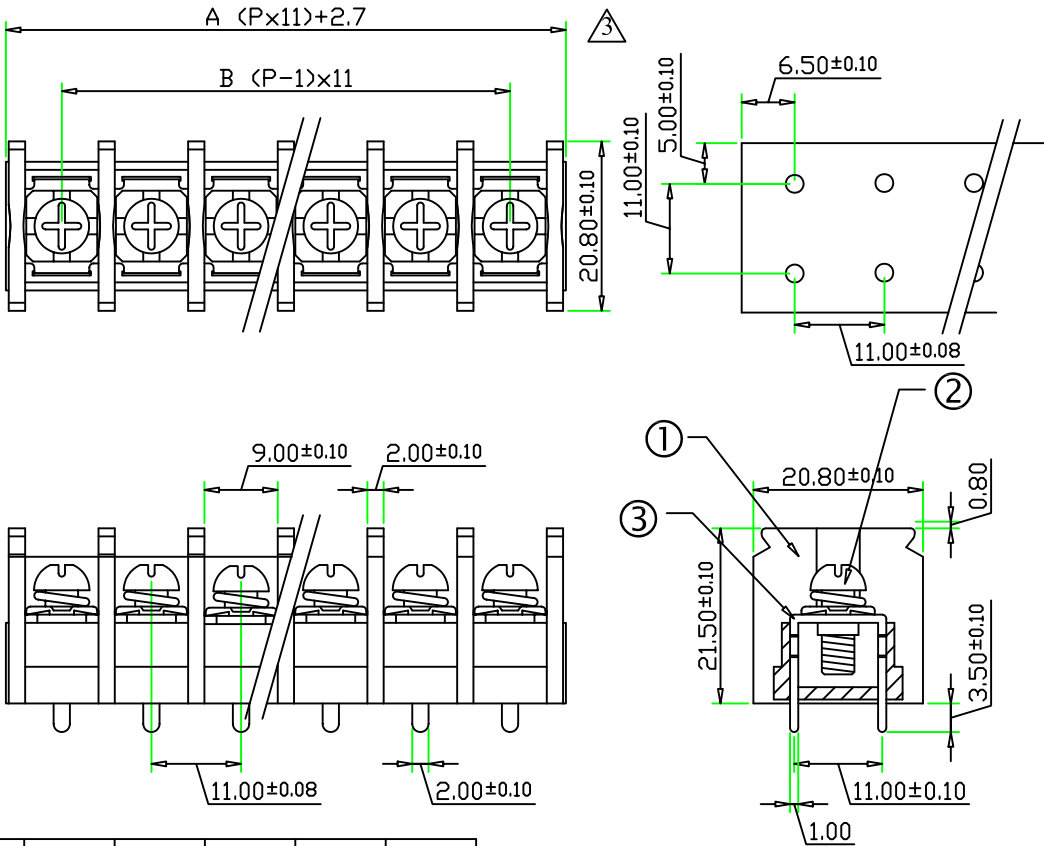

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	24.7	35.7	46.7	57.7	68.7	79.7	90.7	101.7	112.7	123.7	134.7	145.7	156.7	167.7
B	11	22	33	44	55	66	77	88	99	110	121	132	143	154
POLE	16	17	18	19	20	21	22	23						
A	178.7	189.7	200.7	211.7	222.7	233.7	244.7	255.7						
B	165	176	187	198	209	220	231	242						



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBB110-DB-xx-LF

SERIES

LEADFREE

02~23WAY

2 ROW

DIP 180°

DESCRIPTION: Barrier type terminal block