


Section A-A

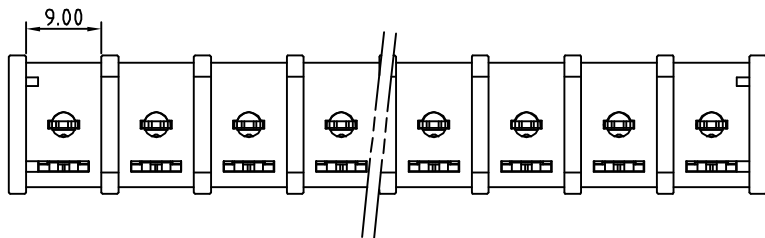

MATERIALS ELECTRICAL  
 RATED VOLTAGE & CURRENT: 300 V, 30 A  
 WITHSTAND VOLTAGE: AC 2000 V/Min  
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V  
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C  
 SCREW TORQUE VALUE: 15 Kgf.cm  
 WIRE RANGE: 22 - 10AWG  
 1) BODY: THERMOPLASTICS, UL94-V0 BLACK  
 2) TERMINAL: BRASS, 0.8t, Tin PLATED  
 3) TERMINAL SCREWS WITH WASHER: STEEL, Ni PLATED, M4.0  
 4) COVER: PC, TRANSPARENT

APPROVAL: US

POLE		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A		24	35	46	57	68	79	90	101	112	123	134	145	156	167	178
B		11	22	33	44	55	66	77	88	99	110	121	132	143	154	165
TOL		+/-0.10							+/-0.20							
POLE	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	189	200	211	222	233	244	255	266	277	288	299	310	321	332	343	354
B	176	187	198	209	220	231	242	253	264	275	286	297	308	319	330	341
TOL		+/-0.30							+/-0.40							

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

TBB110-DC-xx-LF

SERIES LEADFREE  
 02-32 WAY  
 COVER  
 DIP 180°

DESCRIPTION: