


SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK
TERMINALS: TIN PLATED BRASS
SCREW: NICKEL PLATED STEEL
WIRE RANGE: 12-22 STR
RATING: 25 AMPERES. 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000V
 INSULATION RESISTANCE 500M OR MORE AT DC 500V

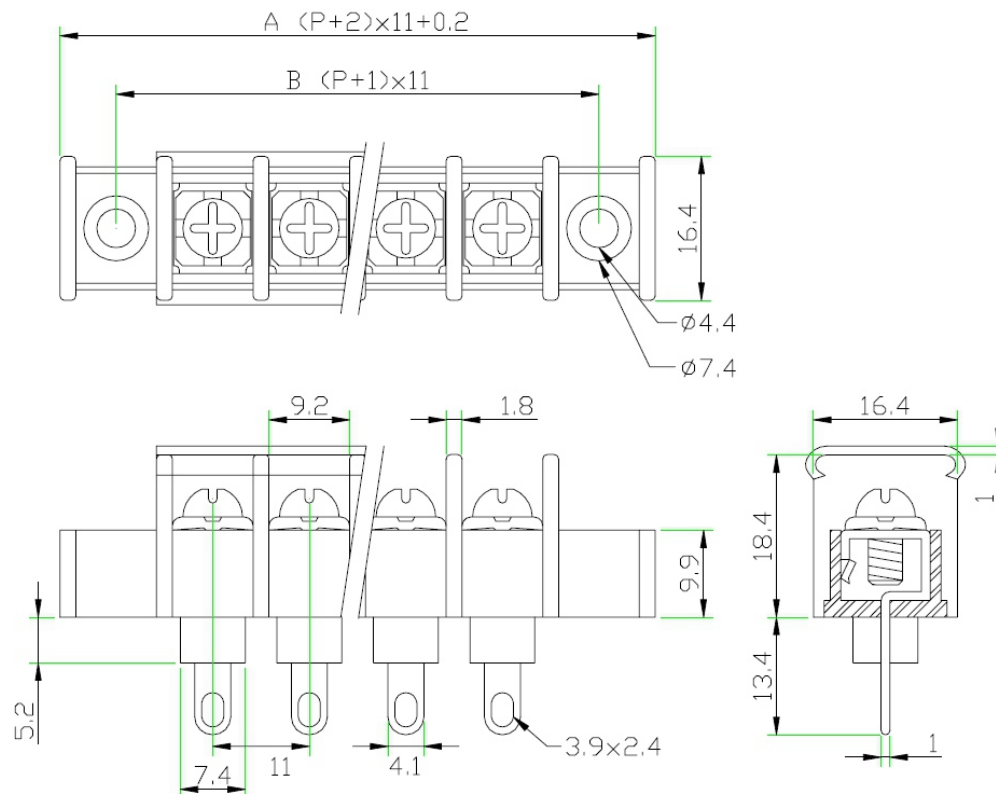

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	44.2	55.2	66.2	77.2	88.2	99.2	110.2	121.2	132.2	143.2	154.2	165.2	176.2	187.2	
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	198.2	209.2	220.2	231.2	242.2	253.2	264.2	275.2	286.2	297.2	308.2	319.2	330.2	341.2	352.2
B	187	198	209	220	231	242	253	264	275	286	297	308	319	330	341

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

TBB110-S13S5EC-xx-LF

SERIES

LEADFREE
 02-30 WAY
 COVER
 EAR
 STANDOFF 5.2mm
 SOLDER LONG 13.40mm

DESCRIPTION: