

SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK

TERMINALS: TIN PLATED BRASS



SCREW: NICKEL PLATED STEEL

WIRE RANGE: 14-18 STR

RATING: 15 AMPERES.250VAC

INSULATION WITHSTANDS VOLTAGE AC 2000V

INSULATION RESISTANCE 500 Ω OR MORE AT DC 500V

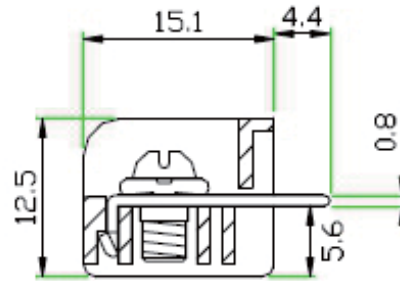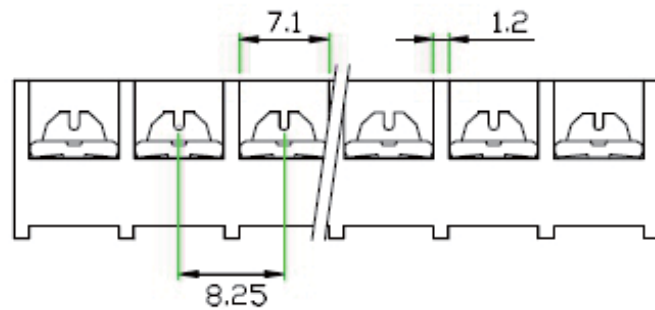

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	17.7	25.95	34.2	42.45	50.7	58.95	67.2	75.45	83.7	91.95	100.2	108.45	116.7	124.95	
B	8.25	16.5	24.75	33	41.25	49.5	57.75	66	74.25	82.5	90.75	99	107.25	115.5	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	133.2	141.45	149.7	157.95	166.2	174.45	182.7	190.95	199.2	207.45	215.7	223.95	232.2	240.45	248.7
B	123.75	132	140.25	148.5	156.75	165	173.25	181.5	189.75	198	206.25	214.5	222.75	231	239.25

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm

照片框

ORDER INFORMATION

TBC082-U-xx-LF

SERIES

LEADFREE

02~30WAY

UP/RIGHT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: