
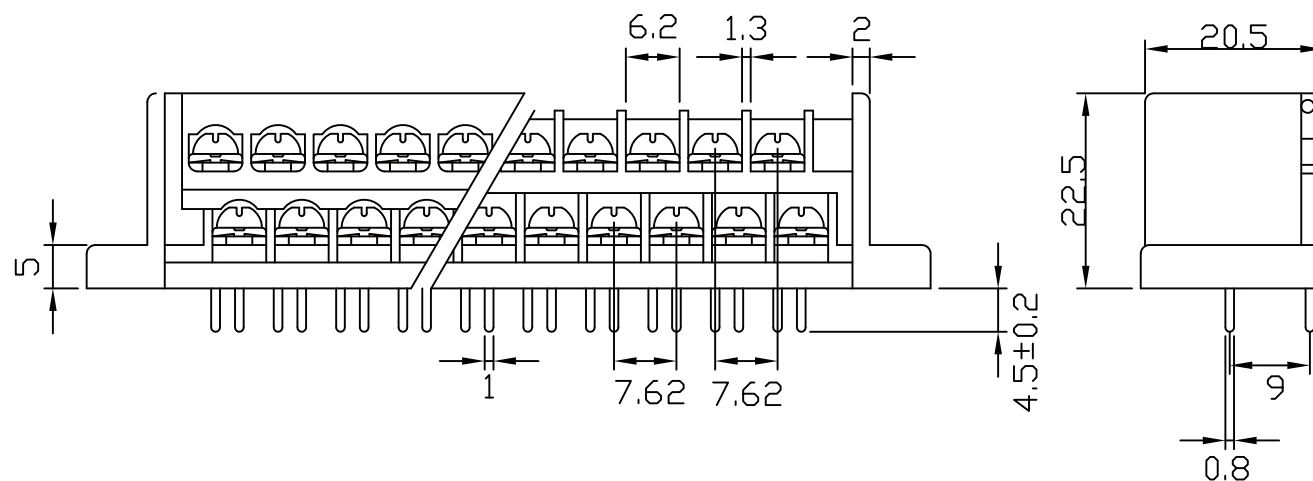


SPECIFICATIONS
BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK
TERMINALS: TIN PLATED BRASS
SCREWS:NICKEL PLATED STEEL
WIRE RANGE AWG: 16-22 STR
RATING:PC MATERIAL
RATING: 15 AMPERES.250VAC
INSULATION WITHSTANDS VOLTAGE AC 2000V
INSULATION RESISTANCE 500M OR MORE AT DC 500V

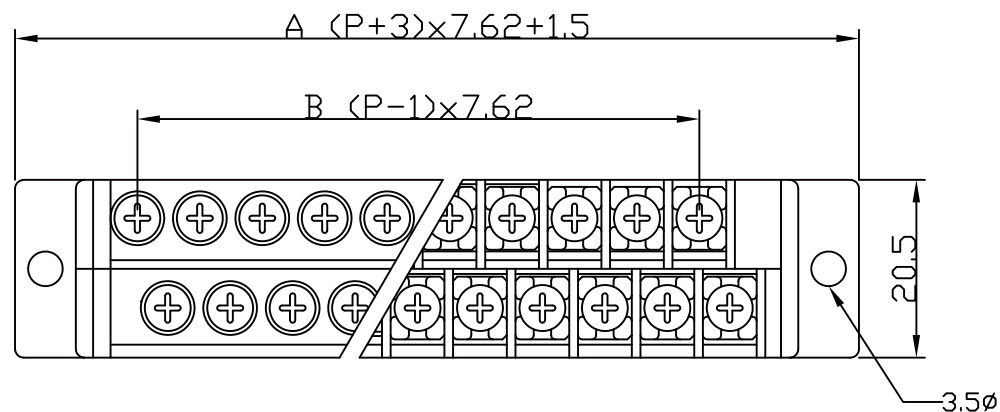

POLE	2	3	4	5	6	7	8	9	10	11	12
A	39.6	47.22	54.84	62.46	70.08	77.7	85.32	91.44	100.56	108.18	115.8
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

TBCZ076-DE-xx-LF

SERIES

LEADFREE
 02~12WAY
 EAR
 DIP 90°

DESCRIPTION: PITCH 7.62mm