

N = Number of poles

Dim A = $N \times 2.54 + 0.4$

Dim B = $(N-1) \times 2.54$



	Dim A	Dim B
2-6p	± 0.15	± 0.10
7-12p	± 0.20	± 0.20
13-18p	± 0.30	± 0.25
19-24p	± 0.40	± 0.30

Material



- Item 1 Terminal housing : PA66 (UL94V-0)
- Item 2 Terminal screw : Steel Zinc plating "-" slot type
- Item 3 Clamp : Brass, Ni plated
- Item 4 Wire guard solder pin (entry) : Brass, Tin plated

Electrical cULus

- ⚠ ● Voltage rating: 150VAC
- Current rating: 6A
- Wire range:
- ⚠ ● Solid wire(AWG): 18-30
- ⚠ ● Stranded wire(AWG): 18-30
- Torque: 1.3Lb-In
- Screw: M1.6
- Wire strip length: 4-5mm
- ⚠ ● Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to $+115^{\circ}\text{C}$
- Soldering temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}/5 \text{ Sec}$
- Safety Approval: US

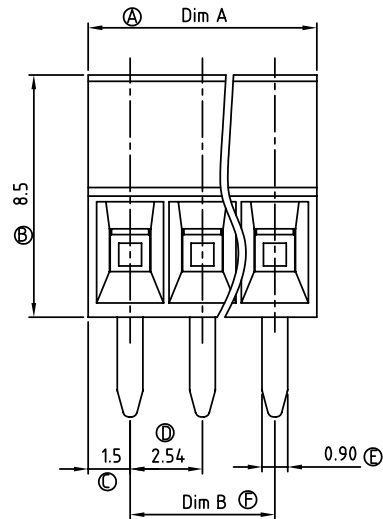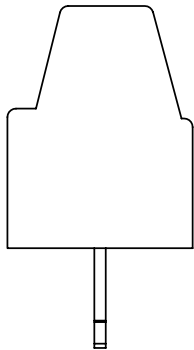

N=Number of contacts

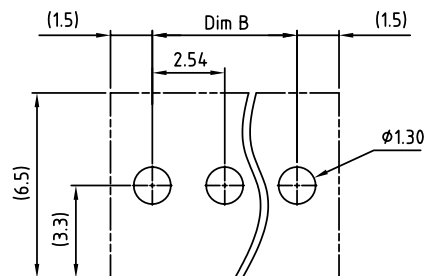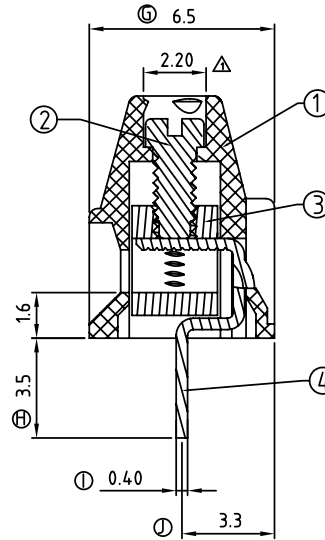

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

X, ± 0.30

.XX, ± 0.10

.XXX, $\pm$

ANG $\pm 1^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

TBH026-D08-xx-LF

SERIES

LEADFREE

02-24WAY

HIGH 8.5mm

DIP180°

DESCRIPTION: