

Technical Data:

Material:




- Contact(metal housing): Brass (CuZn)
- Terminal screw: Steel galvanized and chromate or Nickel plated or Tin plated(standard)(option)
- Wire guard: Brass With Tin plated
- Surface of solder tail: Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10Amps/way max
- Contact resistance: 20mΩ(max)
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: 1500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-30AWG


Mechanical:

- Torque: 2kgf.cm/M2.0
- Operating temperature: -30°C to +105°C
- Soldering reliability: Test temperature= 250°C±10°C
5 seconds max

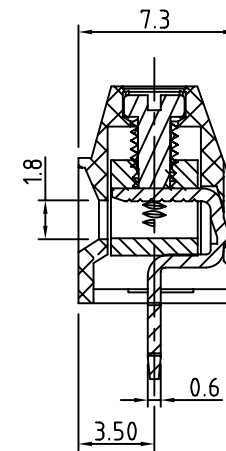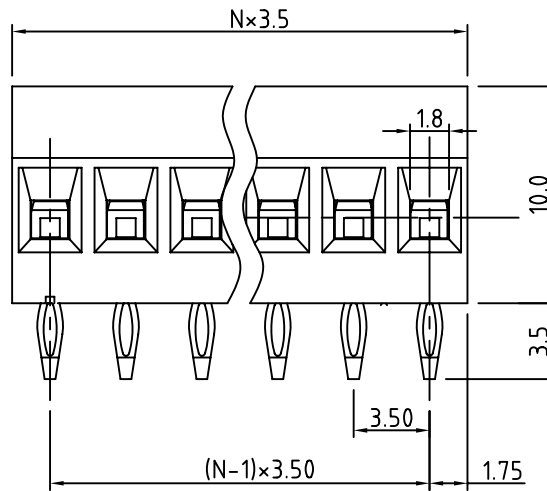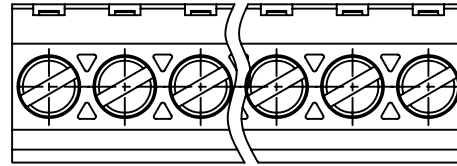

N=Number of Contacts

P.C.B. LAYOUT

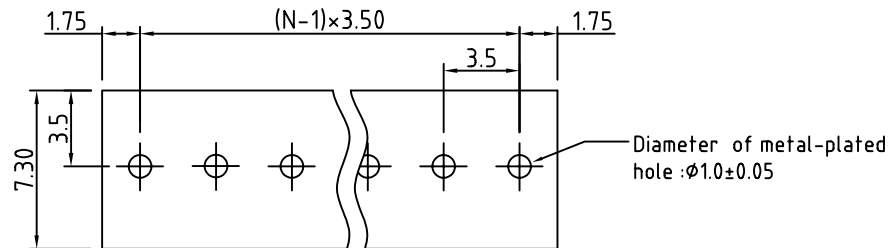

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH035-P10-xx-LF

SERIES

LEADFREE

02-24WAY

HIGH 10.0mm

PRESS FIT

DESCRIPTION: