
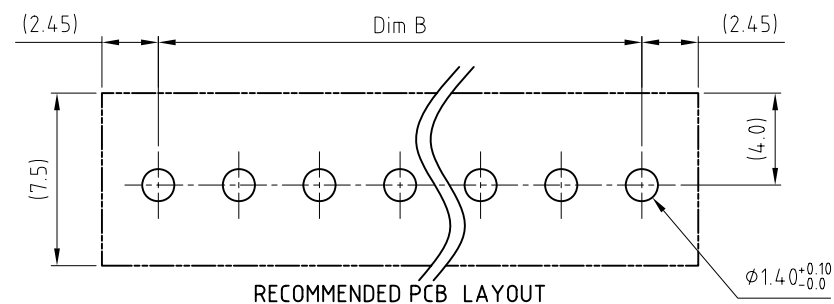
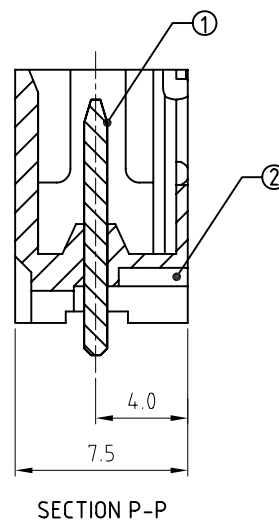


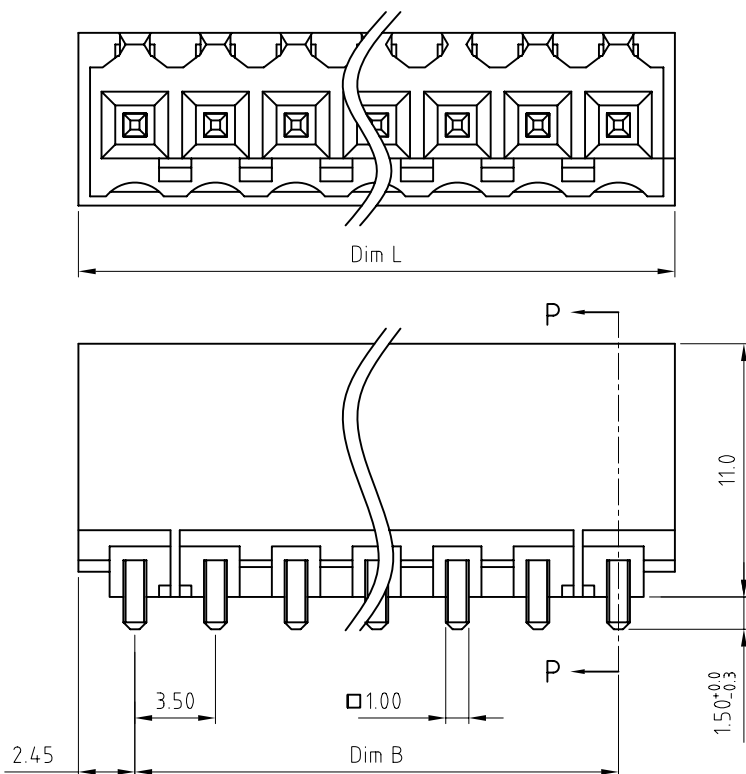

Material

- Item①Solid PIN: Brass(CuZn),Tin plated.
- Item②Insulator (housing): PA6T 30%GF(UL94V-0)

Electrical cULus / IEC

- Voltage rating: 300V/160V
- Current rating: 10A/13A
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40° C to +130° C
- Soldering temperature: 260° C $\pm$ 10° C/10 Sec

Poles	2p	3p	4p	5p	6p	7p	8p	9p	10p	11p	12p	13p
Dim L	8.40	11.9	15.4	18.9	22.4	25.9	29.4	32.9	36.4	39.9	43.4	46.9
Dim B	3.50	7.00	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
TOL	± 0.15					± 0.20					± 0.25	
Poles	14p	15p	16p	17p	18p	19p	20p	21p	22p	23p	24p	
Dim L	50.4	53.9	57.4	60.9	64.4	67.9	71.4	74.9	78.4	81.9	85.4	
Dim B	45.5	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	80.5	
TOL	± 0.25					± 0.30						

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBH035-PDB-xx-LF

SERIES

LEADFREE
02~24WAY
BOX
DIP 180°
MALE

DESCRIPTION: