


SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Terminals: Tin Plated Brass

Rated: 8 Amperes.AC300V
Operation Temperature: -55°C~+115°C
Insulation withstands volt: AC2000V min
Insulation resistance: >1000MΩ or more at DC500V

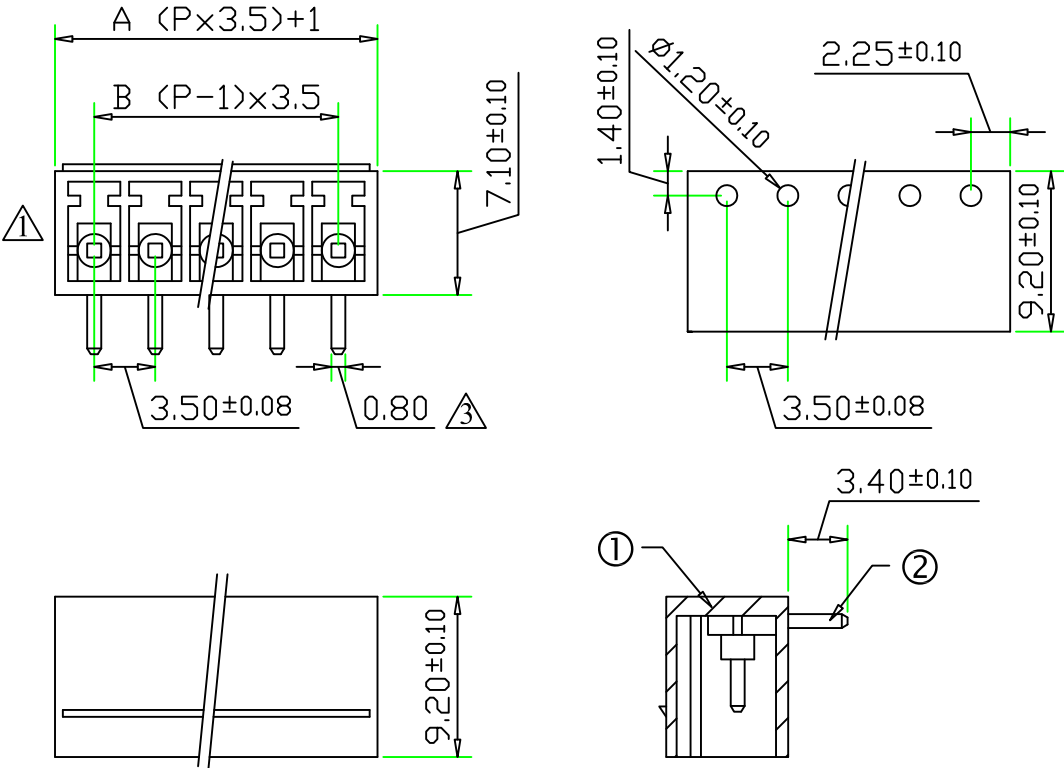

Tolerance ± 0.50

POLE	2	3	4	5	6	7	8	9	10	11	12	②
A	8	11.5	15	18.5	22	25.5	29	32.5	36	39.5	43	
B	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	46.5	50	53.5	57	60.5	64	67.5	71	74.5	78	81.5	85
B	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH035-PRC-xx-LF

SERIES

LEADFREE

02~24WAY

CAGE

DIP 90°

MALE

DESCRIPTION: Pluggable type terminal block