


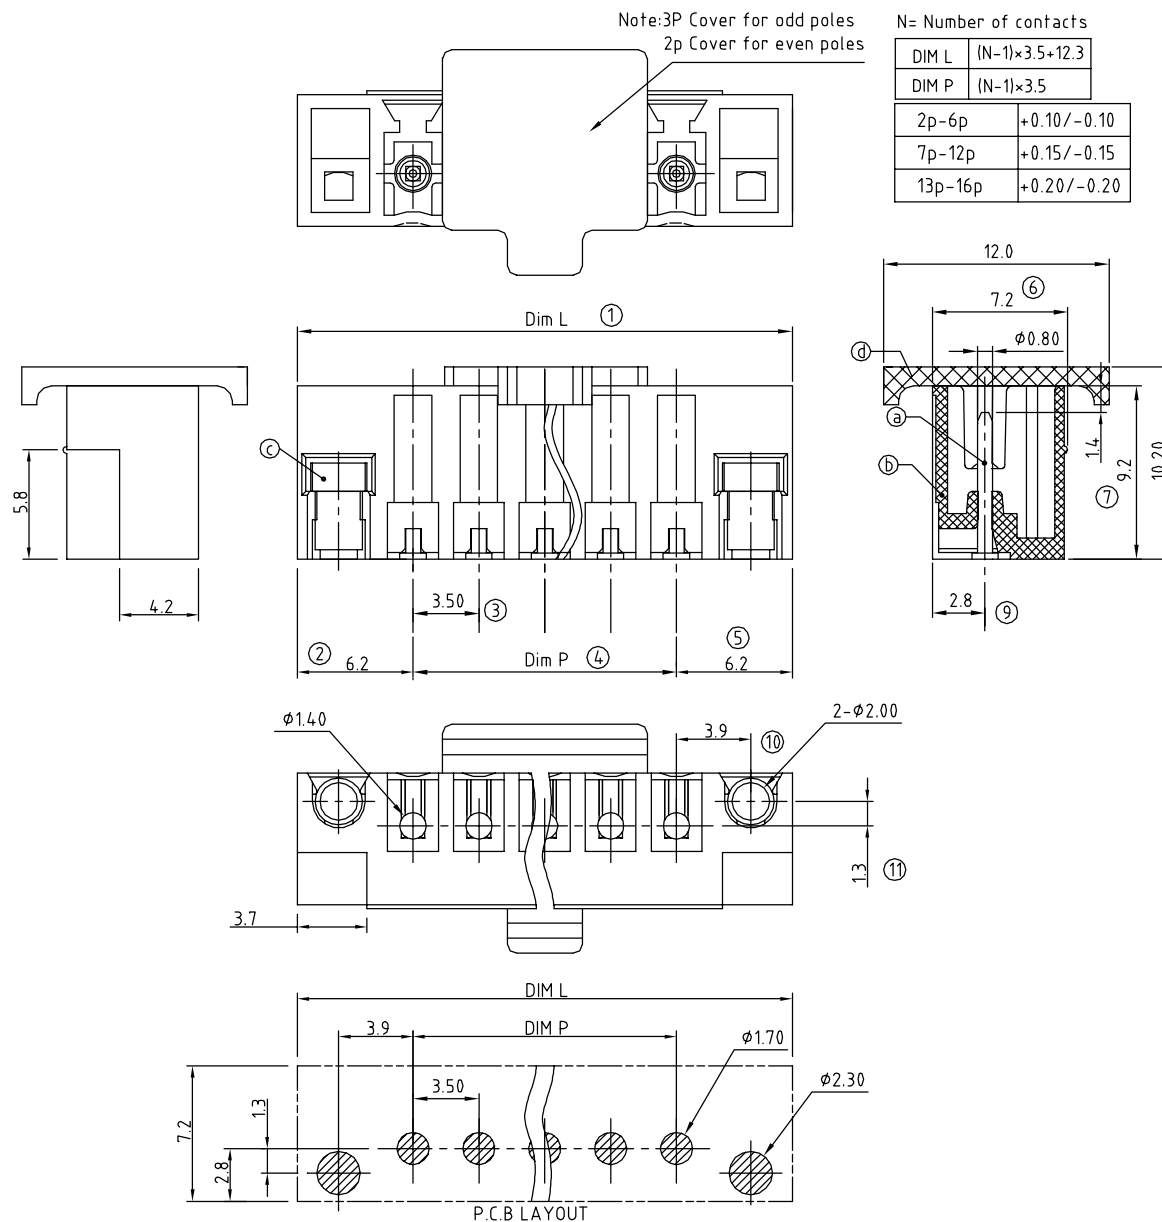

Material:

- Item ③ Male contact pin: Brass ,Tin plated
 - Item ⑥ Terminalhousing: PA9T (UL94V-0)
 - Item ⑧ With flange stud: Brass ,Tin plated
 - Item ⑪ With cover: PA46 (UL94V-0)
- Electrical: cULus
- Voltage rating: 150V
 - Current rating: 8A
 - Withstanding Voltage: 1.3 KV
 - Operating temperature: -45°C to +130°C
 - Soldering temperature: 280°C/10 Sec
 - Safety Approval:

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

TBH035-PVXC-xx-LF

SERIES | | | | LEADFREE
02~16WAY
CAP
NON POST
180°SMT
MALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: