
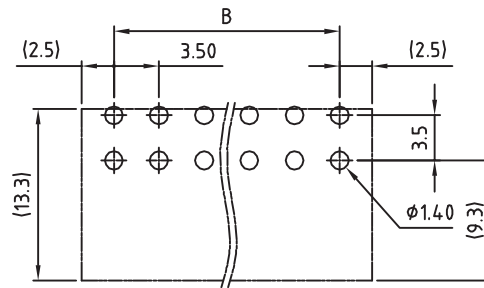


Material:
 ● Item ① Insulator(housing): Thermoplastic (UL94V-0)
 ● Item ② Contact pin: Brass(CuZn) Tin plated

Electrical: cULus
 ● Voltage rating: 300V
 ● Current rating: 10A
 ● Withstanding Voltage: 1.6 KV
 ● Operating temperature: -40°C to +120°C
 ● Soldering temperature: 260°C±10°C/5 Sec

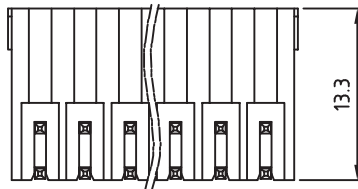

PCB Layout

TBH035B1-PRC-xx-LF
 LEADFREE
 02 ~ 24 WAY/ROW
 (04)~(48)

RoHS Compliant

| | | | | | | | | | | | | |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| POLE | | 2×2 | 2×3 | 2×4 | 2×5 | 2×6 | 2×7 | 2×8 | 2×9 | 2×10 | 2×11 | 2×12 |
| A | | 8.50 | 12.00 | 15.50 | 19.00 | 22.50 | 26.00 | 29.50 | 33.00 | 36.50 | 40.00 | 43.50 |
| B | | 3.50 | 7.00 | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 | 35.00 | 38.50 |
| Tol. | | ±0.15 | | | | | ±0.20 | | | | | |
| POLE | 2×13 | 2×14 | 2×15 | 2×16 | 2×17 | 2×18 | 2×19 | 2×20 | 2×21 | 2×22 | 2×23 | 2×24 |
| A | 47.00 | 50.50 | 54.00 | 57.50 | 61.00 | 64.50 | 68.00 | 71.50 | 75.00 | 78.50 | 82.00 | 85.50 |
| B | 42.00 | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 | 66.50 | 70.00 | 73.50 | 77.00 | 80.50 |
| Tol. | ±0.25 | | | | | ±0.30 | | | | | | |

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. TBH035B1-PRC-xx

DWG NO. TBH035B1-PRC-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司