
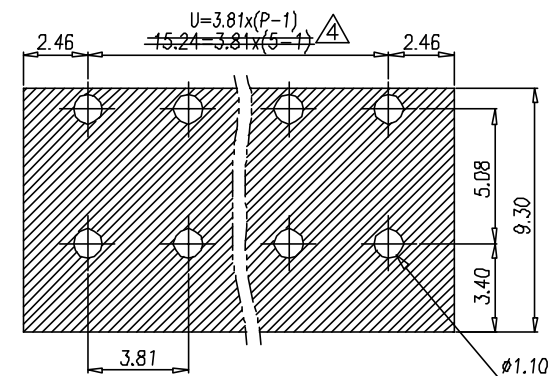
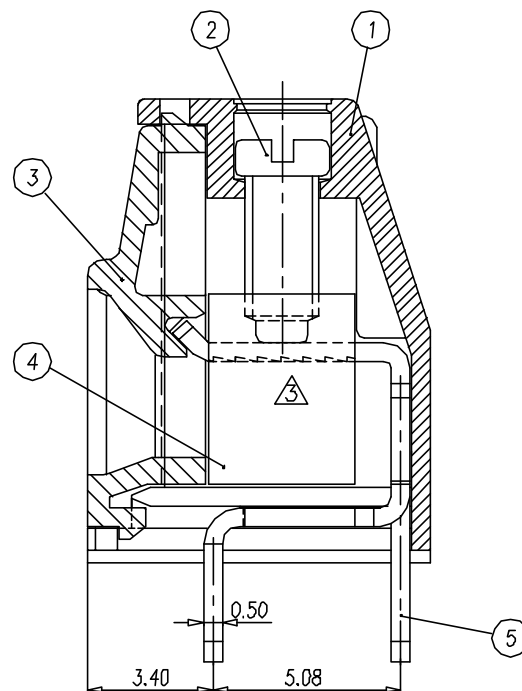


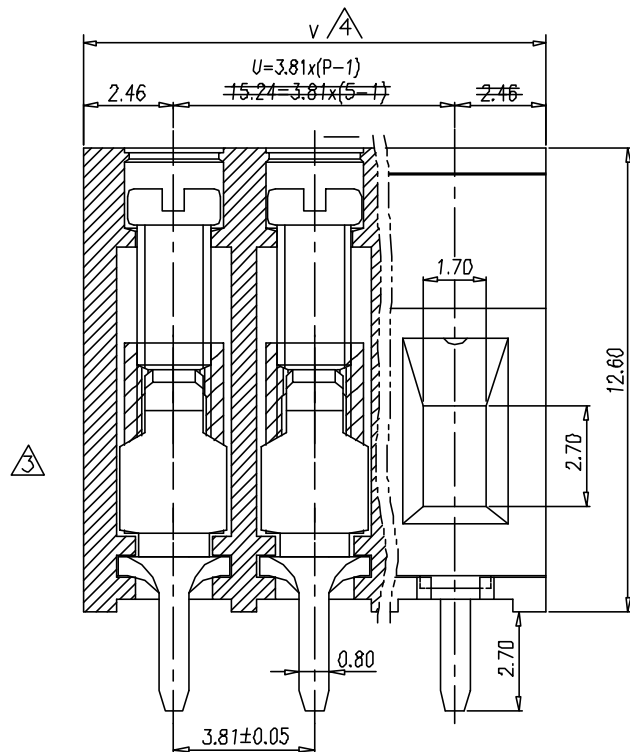

P.C.B. LAYOUT

NOTES:

- Rating: 300V 10A
PITCH: 3.81 mm
- Insulation Withstands Voltage:
AC 2000 V/MIN
- Insulation Resistance:
500MΩ or more at DC500V
- Using Temperature Range:
-40°C~+105°C
- Screw Torque Value: 2 kgf-cm (MAX)
- Suitable Electric Wire: AWG 28~16
- Undimensioned Tolerances:

—	∩	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

4

P	2	3	4	5	6	7	8	9
U	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48
V	8.73	12.54	16.35	20.16	23.97	27.78	31.59	35.4
P	10	11	12	13	14	15	16	
U	34.29	38.1	41.91	45.72	49.53	53.34	57.15	
V	39.21	43.02	46.83	50.64	54.45	58.26	62.07	
Tolerances for PITCH ERROR								

3

5	SOLDER PIN		P	COPPER	Tin PLATED
4	WIRE CAGE		P	C3602	Tin PLATED
3	END COVER		1	PA66(V0)	G001
2	SCREW		P	STEEL	M2/Zn Plated
1	HOUSING		1	PA66(V0)	G001
ITEM	NAME OF PART	NO. OF PART	Q*TY	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH038-D12B-xx-LF

SERIES

LEADFREE
02~16WAY
2 ROW FOOT
HIGH 12.6mm
DIP 180°

DESCRIPTION: