

Technical Data:

Material:


- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical



- Voltage rating: 300VAC
- Current rating: 8A
- Insulation resistance: 500MΩ at DC 500V
- Withstanding Voltage: AC1500V(1min)

Mechanical:


- Using temperature Range: -30°C to +105°C
- Soldering temperature: +250°, 5seconds Max.



P.C.B LAYOUT

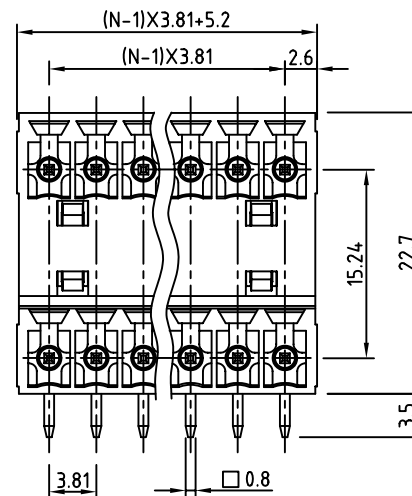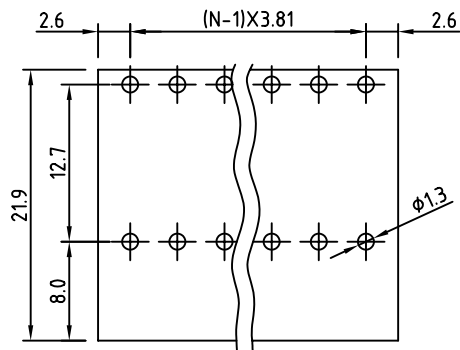

N=Number of contacts

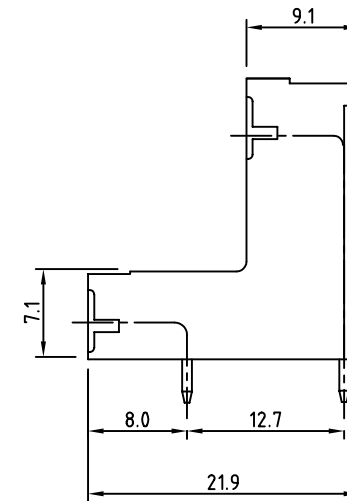

PART NO. TBH038L1-PR05-xx

DWG NO. TBH038L1-PR05-xx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.3
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司