

SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK

TERMINALS: TIN PLATED BRASS

SCREWS:ZINC PLATED STEEL

WIRE RANGE AWG: 14-22 STR

RATING: 10AMPERES.300VAC

INSULATION WITHSTANDS VOLTAGE AC 2000V


INSULATION RESISTANCE 500M OR MORE AT DC 500V

FEATURES

SUPPLY 2P.3P CAN BE DOVETAILED TOGETHER

TO MAKE ANY LENGTH DIFFERENT

COMBINATIONS

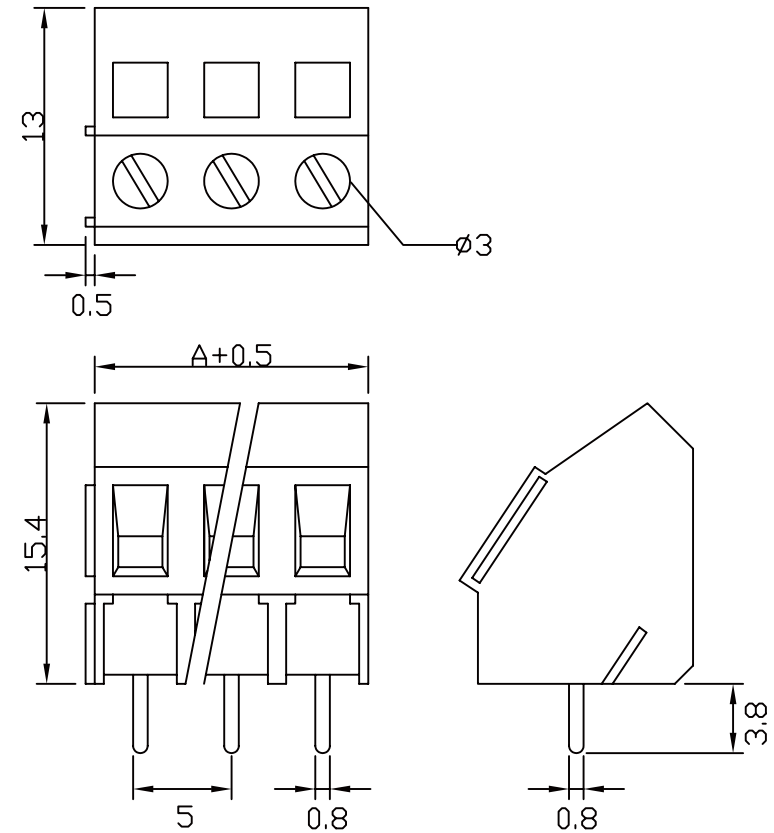

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	10	15	20	25	30	35	40	45	50	55	60	65	70	75
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	
A	80	85	90	95	100	110	115	120	120	125	130	135	140	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH050-A15BK-xx-LF

SERIES

LEADFREE
02~28WAY
BLACK
HIGH 15.5mm
SLANT DIP

DESCRIPTION: