

SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.6 Yellow Zinc Plated Steel
- ③ Terminals: Tin Plated Brass
- ④ Wire Protector: Nickel Plated Phosphor Bronze

Screws Torque: 3.5 In-Lb





Wire Range: 16~22 AWG

Rated: 10 Amperes.AC250V

Operation Temperature: -55°C~+100°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

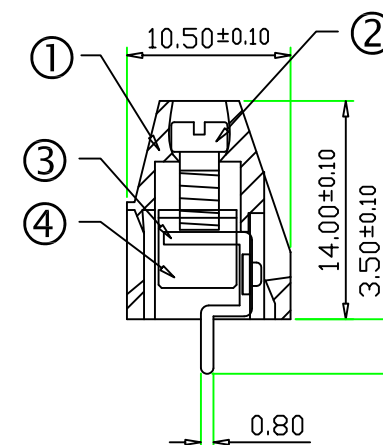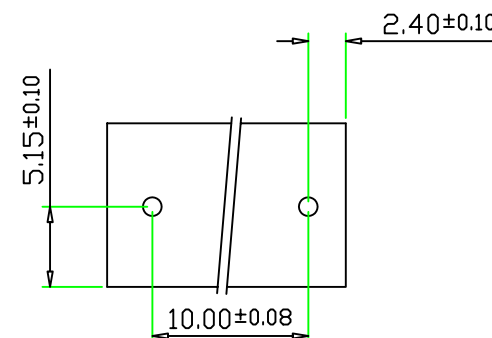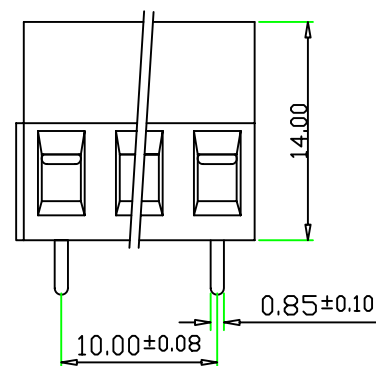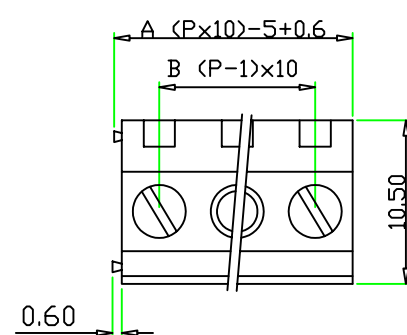

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11		
A	15.6	25.6	35.6	45.6	55.6	65.6	75.6	85.6	95.6	105.6		
B	10	20	30	40	50	60	70	80	90	100		
POLE	12	13	14	15	16	17	18	19	20	21	22	23
A	115.6	125.6	135.6	145.6	155.6	165.6	175.6	185.6	195.6	205.6	215.6	225.6
B	110	120	130	140	150	160	170	180	190	200	210	220

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

TBH050-D14EE-xx-LF

SERIES

LEADFREE

02~23 WAY

EMPTY EVEN PIN

HIGH 14.5mm

DIP 180°

DESCRIPTION: