
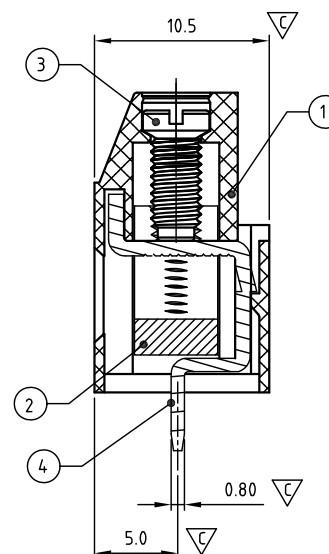
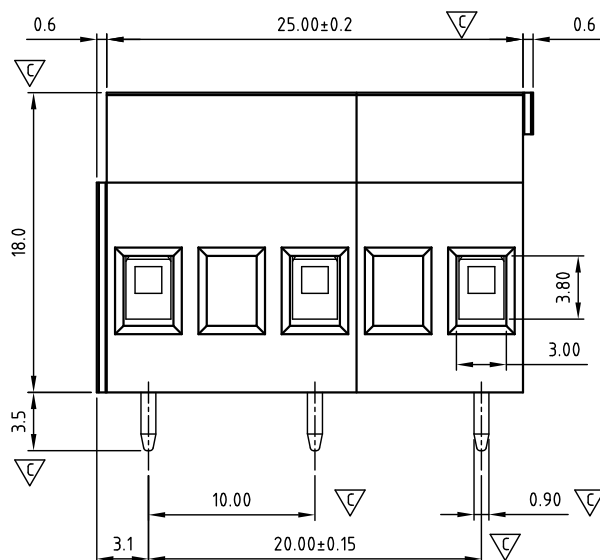
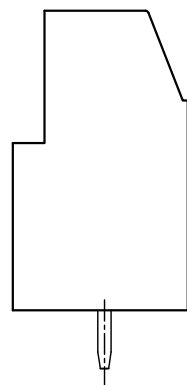
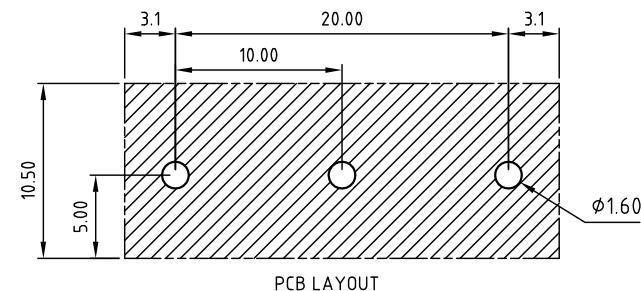


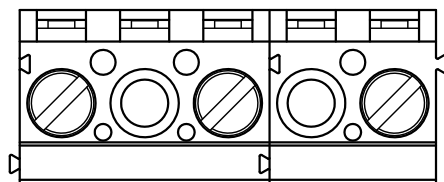

Technical data

1.Nominal voltage: 300V/20A
PITCH:5.0mm

2.Connection capacity:
AWG 30-12

3.Insulation Withstands Voltage:
AC 1600V/MIN

4.Insulation Resistance:
1000MΩ or more at DC500V

5.Tightening torque:
5.0kgf.cm (0.5N.m)

6.Screw thread: M3

7.Stripping length: 7-8mm

8.Using temperature range:-40C°~115C°
Soldering temperature:250±10C°/5s

9.Safety approval:

10.RoHS Compliance

12.Critical dimension: ∇C

4	CONTACT	BRASS	Tin PLATED	3
3	SCREW	STEEL	M3×0.5, Zn Plated	3
2	CAGE	BRASS	M3×0.5, Ni PLATED	3
1	BODY	PA66 UL94V-0	BLACK	1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION ∇C

照片框

ORDER INFORMATION

TBH050-D18EE-03-LF

SERIES

LEADFREE

03WAY

EMPTY#DUAL

HIGH 18.0mm

DIP180°

DESCRIPTION: