
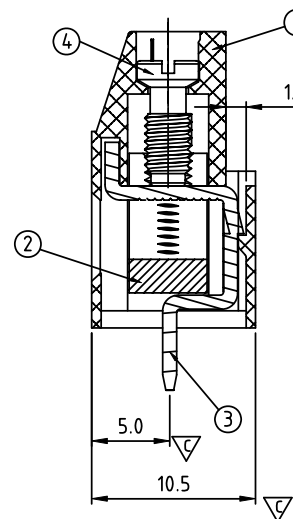
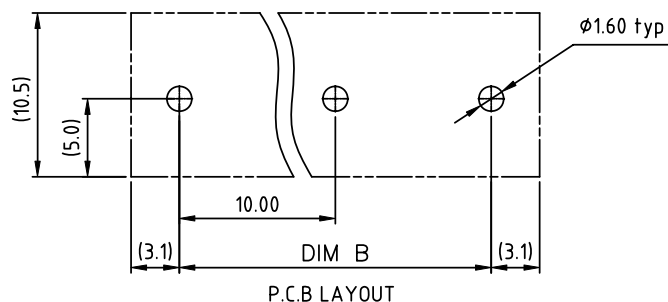


N = Number of poles
 Dim A = $N \times 10.0 - 5.0$
 Dim B = $(N-1) \times 10.0$

Poles	Dim A	Dim B
2-5p	± 0.25	± 0.20
6-9p	± 0.35	± 0.30
10-12p	± 0.45	± 0.40

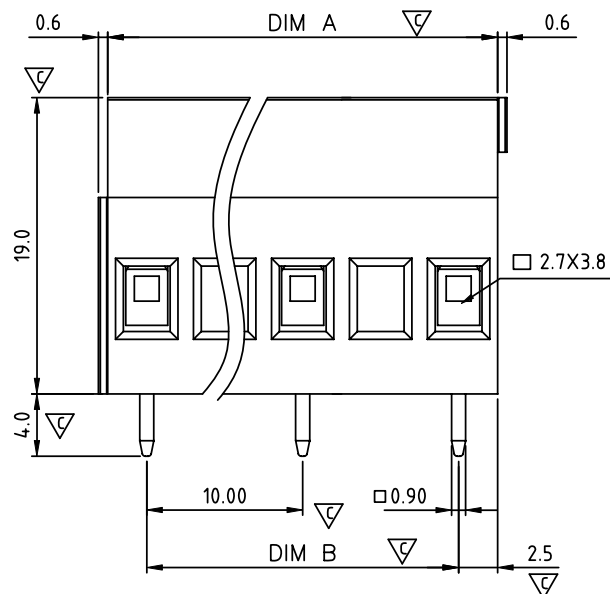

Material:

- Item 1 Terminal housing: Thermoplastic (UL 94V-0)
- Item 2 Clamp: Brass Ni plated
- Item 3 Wire guard solder pin: Brass Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type
- Item 5 Terminal cover: Thermoplastic (UL 94V-0)

Electrical cULus / VDE

- Voltage rating : 300VAC / 450V
- Current rating : 20A / 24A
- Wire range : 0.2-2.5mm²
- Solid wire(AWG) : 12-30
- Stranded wire(AWG) : 12-30
- Torque : 3.5 Lb-In / 0.5 N.m
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C $\pm$ 5°C/5 Sec
- Safety Approval: cULus VDE
- Critical dimension:

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ± 0.10

DATE

ANG $\pm 1^\circ$

SIZE A4

PPOJECTION



ORDER INFORMATION

TBH050-D19EE-xx-LF

SERIES LEADFREE
 02-12WAY
 EMPTY#DUAL
 HIGH 19.0mm
 DIP180°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com