




1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0)
GREEN
TERMINALS: TIN PLATED BRASS
SCREWS: ZINC PLATED STEEL
WIRE RANGE AWG: 16-22 STR
RATING: 10 AMPERES, 250 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000V
 INSULATION RESISTANCE 500Ω OR MORE AT DC 500V

FEATURES
 SUPPLY 2P 3P CAN BE DOVETAILED TOGETHER TO
 MAKE ANY LENGTH & DIFFERENT COMBINATIONS

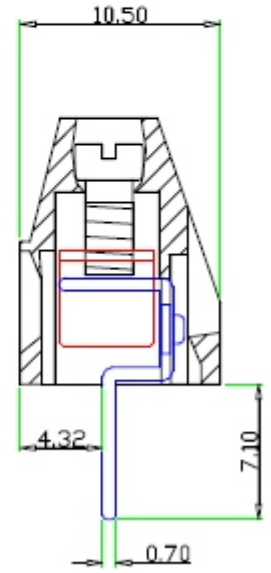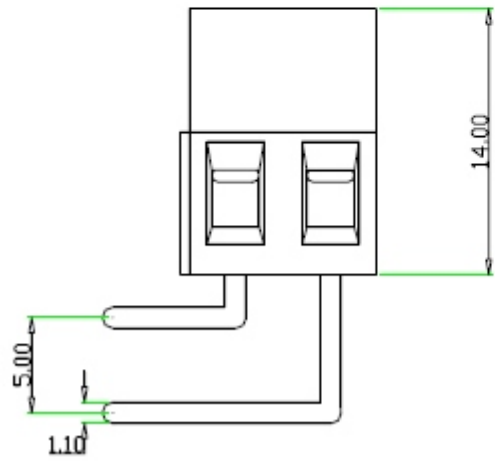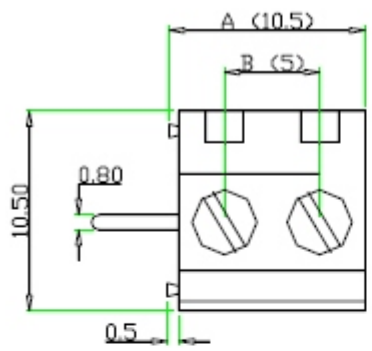

煜倫股份有限公司

PART NO. **TBH050-DL5-02**

DWG NO. **TBH050-DL5-02**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:			
AREA	REVISIONS	HK	DATE