


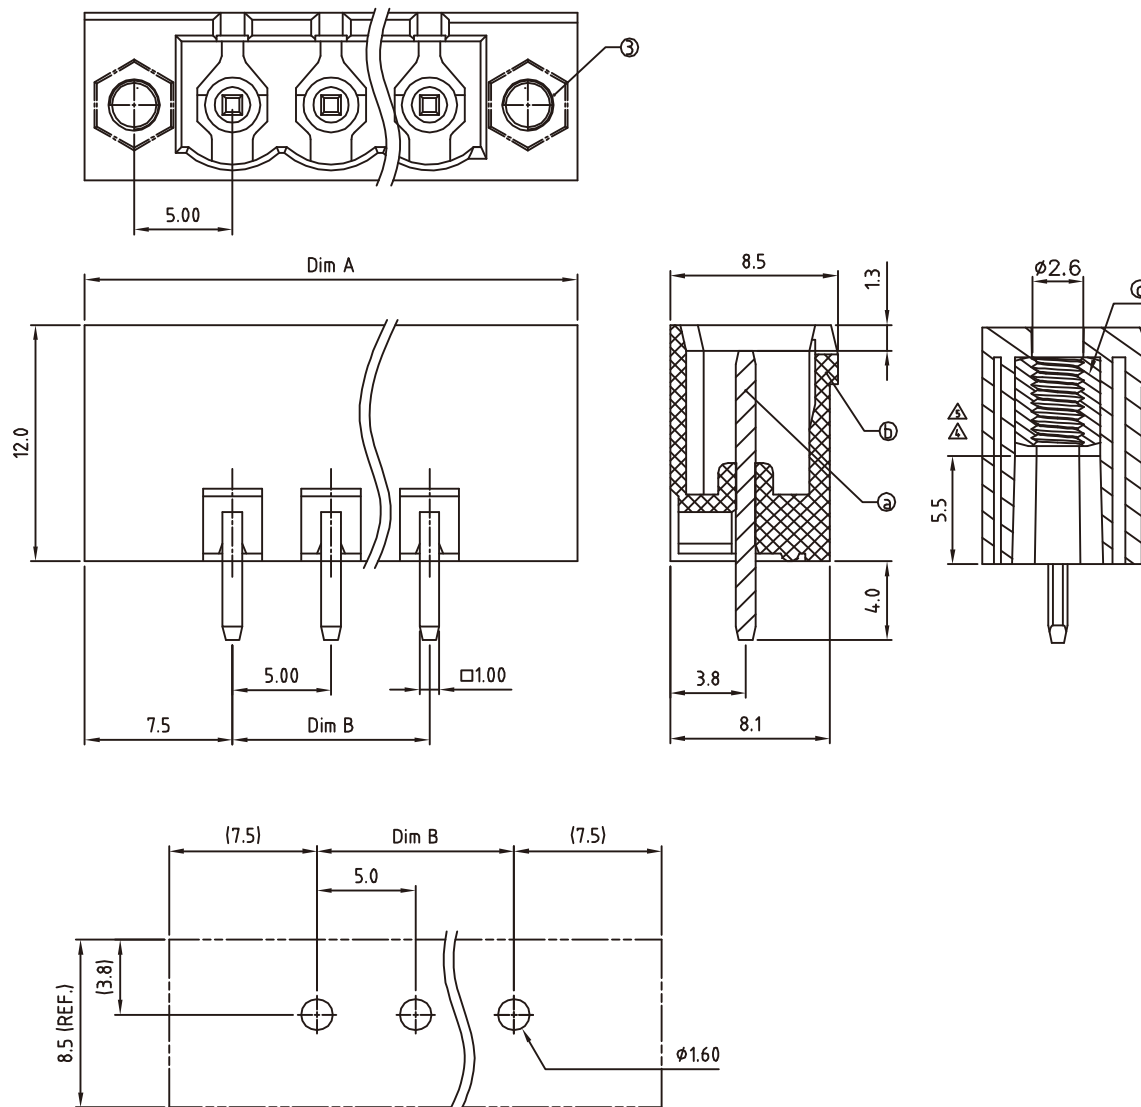

RECOMMENDED PCB LAYOUT

Material:

- Item ③ Contact pin: Brass(CuZn) Tin plated
- Item ④ Insulator(housing): Thermoplastic (UL94 V-0)
- Item ⑤ With flange nut: Brass M2.5

- △ Electrical: cULus /VDE /TUV
- Voltage rating: 300V/300V/300V
 - △ ● Current rating: 20A/20A/20A
 - Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - △ ● Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:



DIMENSION

A	(N+2)×5.0
B	(N-1)×5.0

N= NUMBER OF CONCATS

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH051-PDBF-xx-LF
SERIES
LEADFREE
02~24WAY
FLANGE
BOX
DIP 180°
MALE

DESCRIPTION: