

Technical Data:

Material:



- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical


- Voltage rating: 300VAC
- Current rating: 10A
- Insulation resistance: 500M Ω at DC 500V
- Withstanding Voltage: AC 1500V(1min)

Mechanical:


- Using temperature Range: -40°C to +105°C
- Soldering temperature: +250°, 5seconds Max.

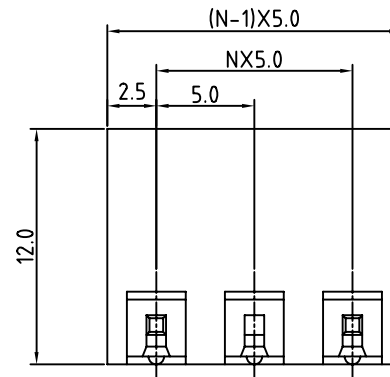

N=Number of contacts



PCB. LAYOUT

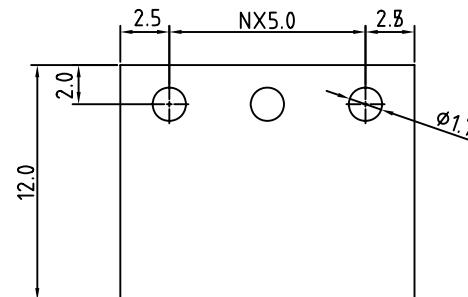

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

TBH050-PREE-xx-LF

SERIES

02~12

EMPTY# DUAL

DIP 90°

MALE

LEADFREE

DESCRIPTION: 5.0mm 90度 / OPEN SERIES