
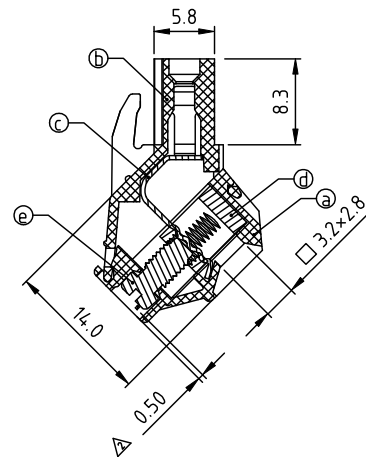
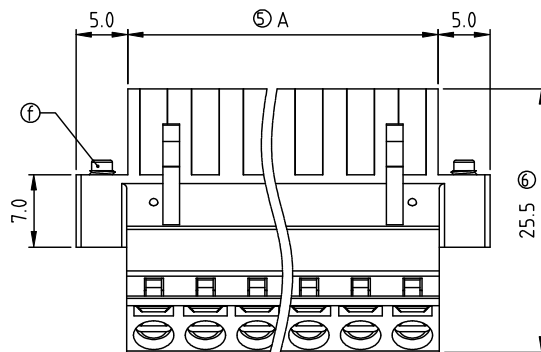



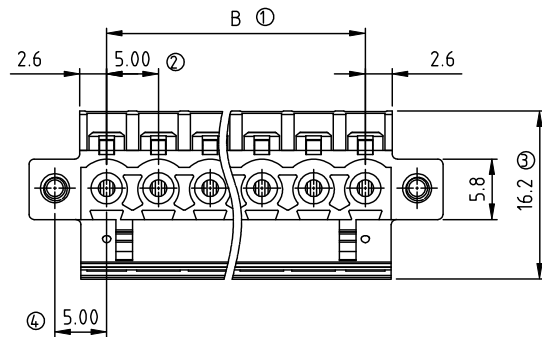

POLE		2	3	4	5	6	7	8	9	10	11	12
A		10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
B		5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00
Tol.	±0.15						±0.20					
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00
B	60.00	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00
Tol.	±0.25						±0.30					

Material:

- Item ③ Terminal(up body): Thermoplastic (UL94V-0)
- Item ④ Terminal(down body): Thermoplastic (UL94V-0)
- Item ⑤ Female contact: PhBz ,Tin plated
- Item ⑥ Clamp: Brass(CuZn) Ni plated
- Item ⑦ Terminal screw: Steel Zinc plating "--" slot type
- Item ⑧ With flange screw: M2.5 Steel Zinc plated. "+/-" slot type

Electrical: cULus

- Voltage rating:300 V
- Current rating:20 A
- Wire range:
- Solid wire(AWG):12-22
- Stranded wire(AWG):12-22
- Torque:4 Lb-In
- Screw:M3
- Wire strip length:7-8 mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-40°C to +115°C
- Safety Approval: 

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

照片框

ORDER INFORMATION

TBH050-SAF-xx-LF

SERIES

02

24

WAY

FLANGE

SLANT

FEMALE

LEADFREE

DESCRIPTION: