

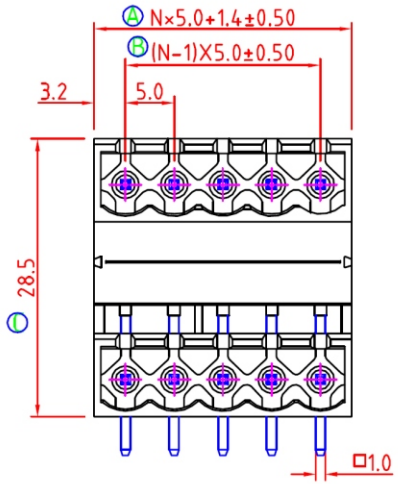

N=Number of contacts

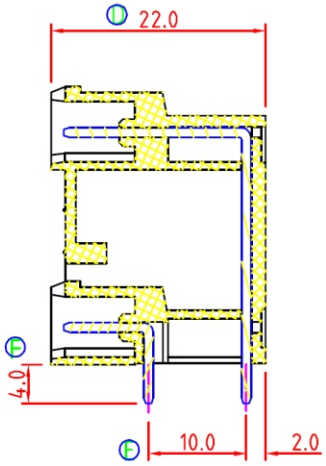

P.C.B. LAYOUT

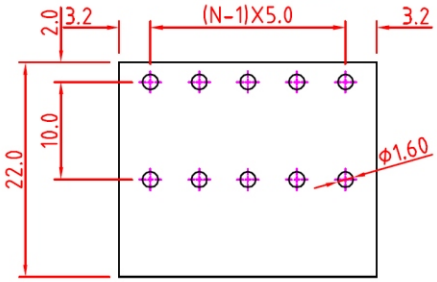

Technical Data:
Material:
- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical
- Voltage rating: 300VAC
- Current rating: 15A
- Insulation resistance: 500MΩat DC 500V
- Withsanding Voltage: AC 1500V(1min)

Mechanical:
- Using temperature Range: -30°C to +105°C
- Soldering temperature:+250°,5seconds Max.

TBH050B1-PRB-xx-LF

LEADFREE

RoHS Compliant

MORETHANALL CONNECTORS ASSEMBLIES	PART NO. TBH050B1-PRB-xx							
	DWG NO. TBH050B1-PRB-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:			
煜倫股份有限公司	FILE NO.		DRAWING BY					
	UNIT / mm	SCALE 1 : 1	PROJECTION		AREA	REVISIONS	HK	DATE