
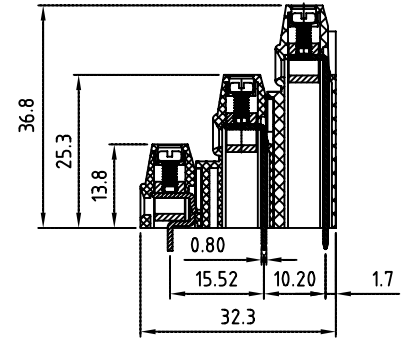



**Material**


- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical**

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 245°C±10°C/5 Sec



N=Number of contacts(Only 1 level)

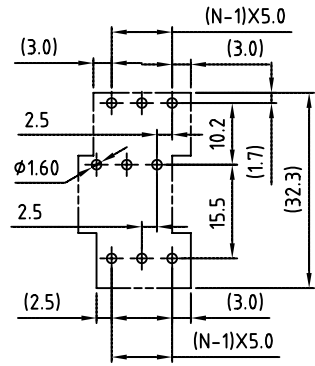

P.C.B. LAYOUT

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

P PROJECTION



**ORDER INFORMATION**

TBH050C1-D13R-xx-LF

SERIES

DIP 180°  
HIGH 13.8mm

LEADFREE  
POS PER ROW  
02:02 WAY  
24:24 WAY  
R TYPE FOOT

DESCRIPTION: