

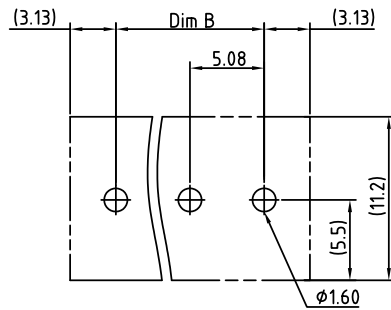
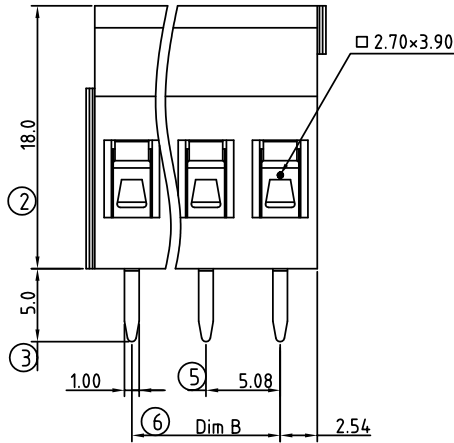


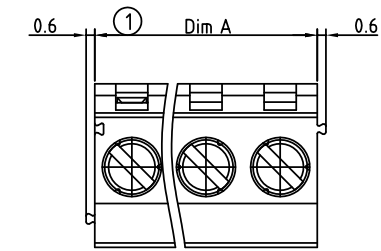

RECOMMENDED PCB LAYOUT

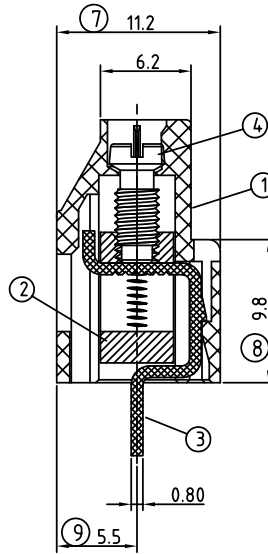

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 12-30
- Stranded wire(AWG): 12-30
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- ▲ Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus

N=NUMBER OF POLES

Dim A=N×5.08
Dim B=(N-1)×5.08

Poles	Dim A Tol	Dim B Tol
2P-6P	±0.15	±0.15
7P-12P	±0.25	±0.25
13P-18P	±0.35	±0.35
19P-24P	±0.40	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

TBH051-D18-xx-LF

SERIES

LEADFREE

02~24 WAY

HIGH 18.0mm

DIP 180°

DESCRIPTION: