

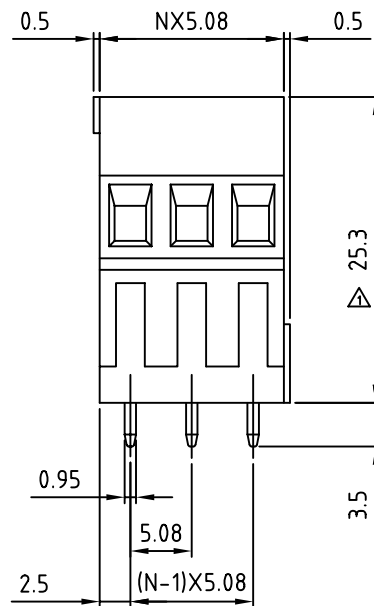




N=Number of contacts

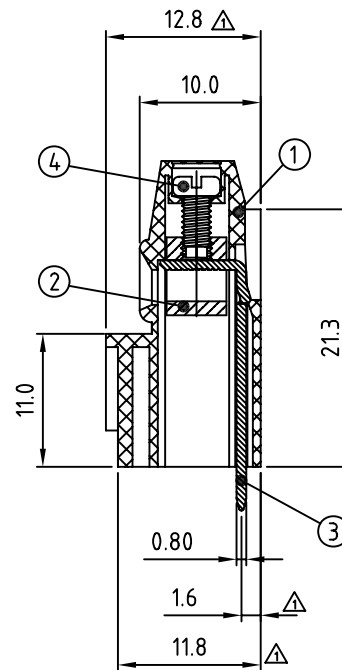


Material:

- Item 1 Insulator body:Thermoplastic (UL 94V-0)
- Item 2 Terminal body(house): Brass ,Ni plated
- Item 3 Contacts:Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"- "slot type

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: us

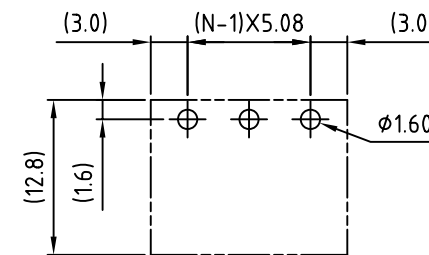

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH051-D25-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 25.3mm

DIP 180°

DESCRIPTION: