

**Material**

- Item a Terminal body: Thermoplastic (UL94V-0)
- Item b Terminal cover: Thermoplastic (UL94V-0)
- Item c Terminal screw: Steel Zinc plating "-" slot type
- Item d Clamp: Zinc alloy, Ni plated
- Item e Male contact pin: PhBz, Tin plated
- Item f Coding key: PC, Yellow

**Electrical**

- Voltage rating: 300VAC
- Current rating: 10A
- Solid wire: 14-24 AWG
- Stranded wire: 14-24 AWG
- Torque: 4.5 Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Critical dimension: ▽

Dim.L	(N-1) × 5.08+6.26
Dim.B	(N-1) × 5.08
Dim.C	(N-1) × 5.08+26.20
Dim.D	(N-1) × 5.08+11.0

Poles	Dim L & B Tol	DimC & D Tol
3p-6p	±0.15	±0.30
7p-12p	±0.25	±0.50
13p-18p	±0.35	±0.60
19p-24p	±0.40	±0.80

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1


.XXX ±

ANG ± 1°

DATE


SIZE A4

PJECTION



**ORDER INFORMATION**

**TBH051-EUPE-xxKx-LF**

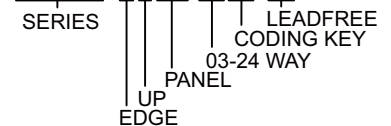

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: