

Technical Data:

Material:



- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical


- Voltage rating: 300VAC
- Current rating: 10A
- Insulation resistance: 500MΩ at DC 500V
- Withstanding Voltage: AC 1500V(1min)

Mechanical:


- Using temperature Range: -40°C to +105°C
- Soldering temperature: +250°, 5seconds Max.

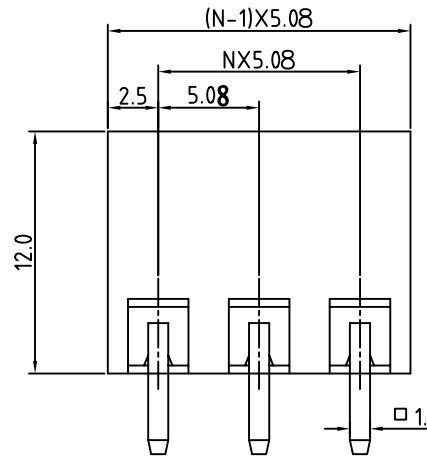

N=Number of contacts

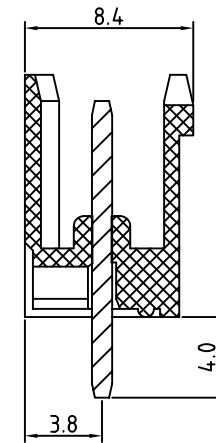

PCB. LAYOUT

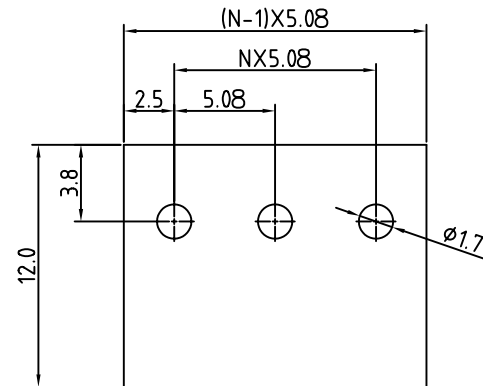

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ±



ORDER INFORMATION

TBH051-PD-xx-LF

SERIES

LEADFREE

02~24WAY

DIP 180°

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 5.08mm 180° OPEN TYPE