




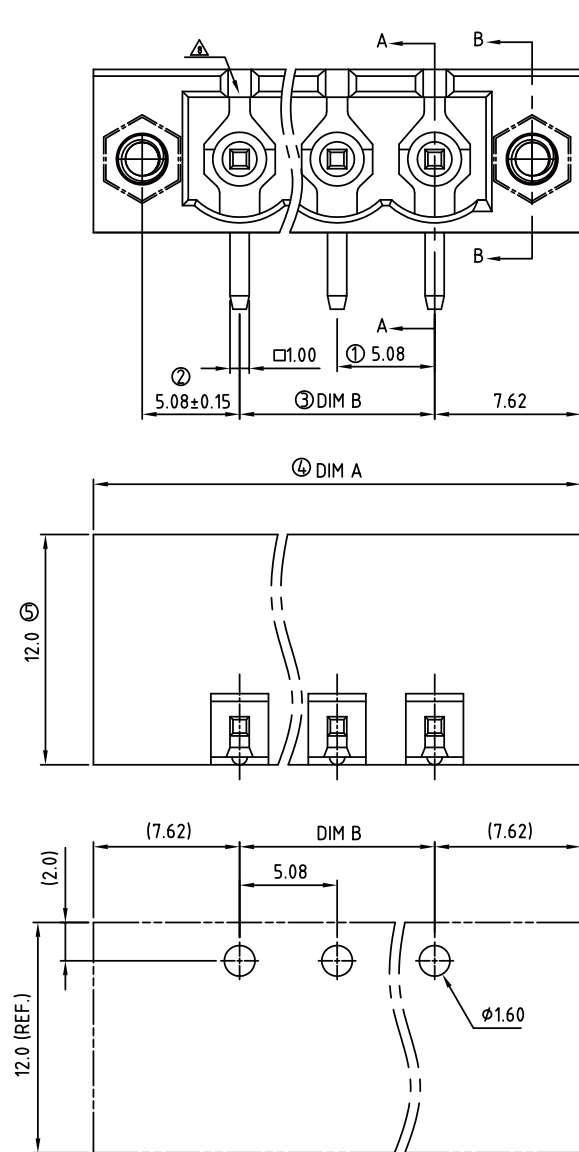

RECOMMENDED PCB LAYOUT



SECTION B-B

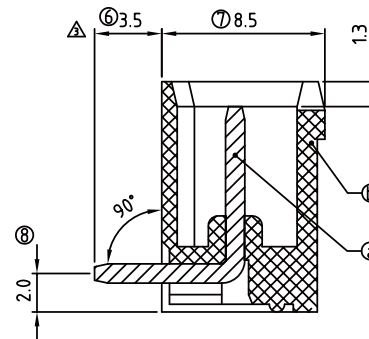

SECTION A-A

Material:

- △ ● Item ③ Male contact pin: Copper Tin plated
- Item ⑤ Terminal (housing): Thermoplastic (UL94V-0)
- Item ⑦ With flange nut: Brass ,M2.5

- △ Electrical: cULus /VDE /TUV
- Voltage rating: 300V/300V/300V
- △ ● Current rating: 20A/20A/20A
- Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- △ ● Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:



DIMENSION

A	(N+2)×5.08
B	(N-1)×5.08

N= NUMBER OF CONCATS

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.30
19P-24P	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH051-PRBFBK-xx-LF

SERIES

MALE

BOX

FLANGE

DIP 90°

LEADFREE

02~24WAY

DESCRIPTION: