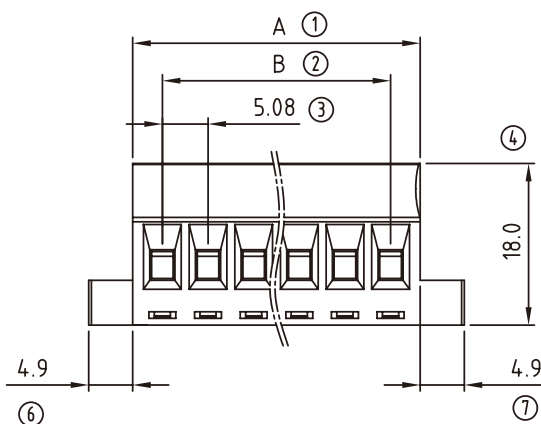
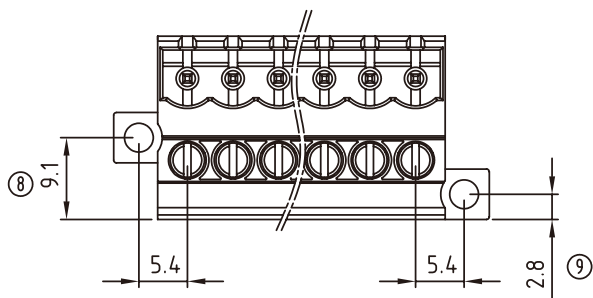


#### Material:

- Item ① Clamp: Brass Ni plated
- Item ② Terminal(housing): Thermoplastic (UL94V-0)
- Item ③ Terminal(cover): Thermoplastic (UL94V-0)
- Item ④ Contact pin : Brass,Tin plated.
- Item ⑤ Terminal screw: Steel Zinc plating solt "-"type M3

#### Electrical:

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 12-30
- Stranded wire(AWG): 12-30
- Torque(Lb-In): 5.2
- Screw: M3
- Wire strip length: 6 -7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Part No.:

|      |       |       |       |       |       |       |       |        |        |        |        |        |
|------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|
| POLE |       | 2     | 3     | 4     | 5     | 6     | 7     | 8      | 9      | 10     | 11     | 12     |
| A    |       | 11.68 | 16.76 | 21.84 | 26.92 | 32.00 | 37.08 | 42.16  | 47.24  | 52.32  | 57.40  | 62.48  |
| B    |       | 5.08  | 10.16 | 15.24 | 20.32 | 25.40 | 30.48 | 35.56  | 40.64  | 45.72  | 50.80  | 55.88  |
| Tol. | ±0.20 |       |       |       |       |       | ±0.25 |        |        |        |        |        |
| POLE | 13    | 14    | 15    | 16    | 17    | 18    | 19    | 20     | 21     | 22     | 23     | 24     |
| A    | 67.56 | 72.64 | 77.72 | 82.80 | 87.88 | 92.96 | 98.04 | 103.12 | 108.20 | 113.28 | 118.36 | 123.44 |
| B    | 60.96 | 66.04 | 71.12 | 76.20 | 81.28 | 86.36 | 91.44 | 96.52  | 101.60 | 106.68 | 111.76 | 116.84 |
| Tol. | ±0.30 |       |       |       |       |       | ±0.40 |        |        |        |        |        |

#### RoHS Compliant

#### TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

#### ORDER INFORMATION

TBH051-PUBPE-xx-LF

SERIES

LEADFREE  
02-24WAY  
PANEL EAR  
BOX  
UP  
MALE

DESCRIPTION: