
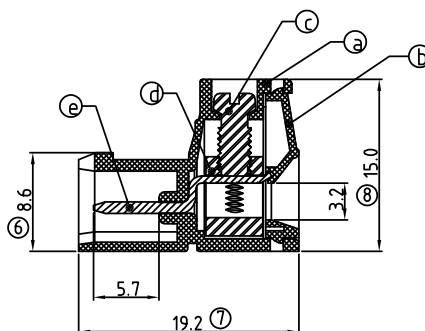
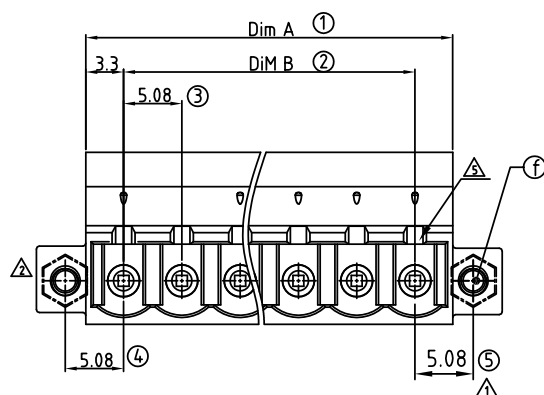
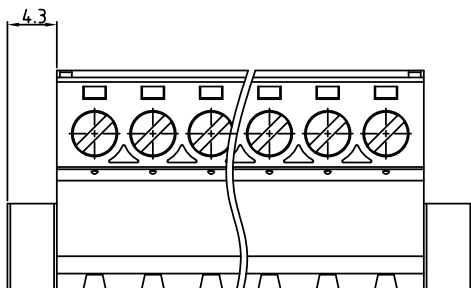




Material

- Item ③ Terminal(housing):Thermoplastic (UL94V-0)
- Item ④ Terminal (Cover):Thermoplastic (UL94V-0)
- Item ⑤ Terminal screw:Steel Zinc plating "-" slot type
- Item ⑥ Clamp:Brass(CuZn) Ni plating
- Item ⑦ Male Contact Pin: Brass, Tin plated
- Item ⑧ Flange nut: Brass M2.5

Electrical

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- △ ● Torque: 4Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Safety Approval:  us

Poles	2	3	4	5	6	7	8	9	10	11	12	13
Dim A	11.66	16.74	21.82	26.90	31.98	37.06	42.14	47.22	52.30	57.38	62.46	67.54
Dim B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
TOL	±0.15						±0.20					
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	72.62	77.70	82.78	87.86	92.94	98.02	103.10	108.18	113.26	118.34	123.42	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
TOL	±0.30						±0.40					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ± 0.30

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG ± 1°

照片框

ORDER INFORMATION

TBH051-PWBF-xx-LF

SERIES

LEADFREE

02-24WAY

FLANGE

BOX

SCREW WIRE

MALE

DESCRIPTION: