
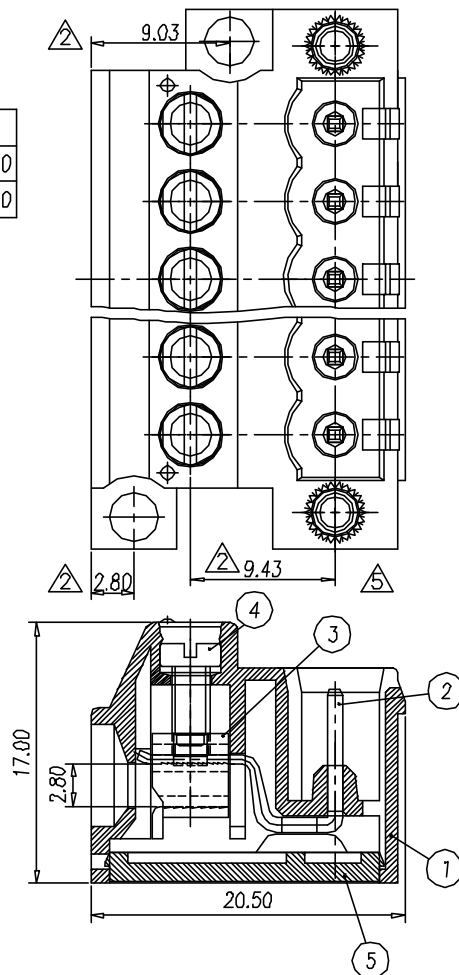



P	2	3	4	5	6	7	8	9	10	11
U	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80
V	12.08	17.16	22.24	27.32	32.40	37.48	42.56	47.64	52.72	57.80
P	12	13	14	15	16	17	18	19	20	
U	55.88	60.96	66.04	71.12	76.20	81.28	86.36	91.44	96.52	
V	62.88	67.96	73.04	78.12	83.20	88.28	93.36	98.44	103.52	
Tolerances for PITCH ERROR										

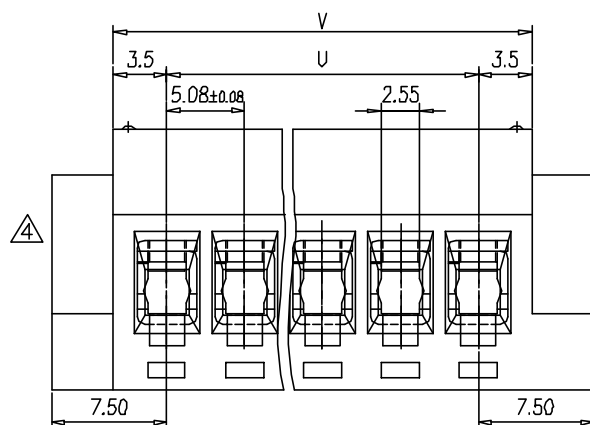

NOTES:

- Rating: 300V 12A (IEC 250V 12A) Δ
PITCH: 5.08mm
- Insulation Withstands Voltage:
AC 1500 V/MIN
- Insulation Resistance:
500M Ω or more at DC1000V
- Using Temperature Range:
-40°C~+105°C
- Screw Torque Value: Δ 6 kgf-cm
- Suitable Electric Wire: AWG 24~12
(IEC 2.5mm²) Δ
- Undimensioned Tolerances:

—	∧	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONS TOLERANCES			±0.3

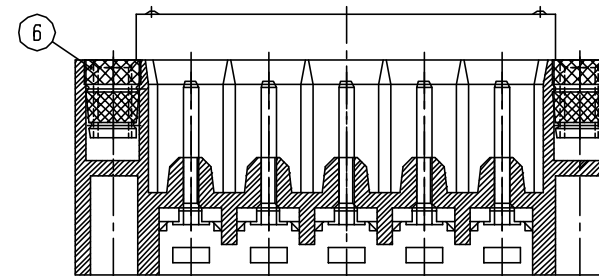

6	NUT		2	BRONZE	M2.5
5	END COVER		1	PA66(V0)	GREEN
4	SCREW		P	STEEL	M2.5/Zn Plated
3	WIRE CAGE		P	STEEL	M2.5/Zn Plated
2	SOLDER PIN		P	COPPER	Tin Plated
1	HOUSING		1	PA66(V0)	GREEN
ITEM	NAME OF PART		Q'TY	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION Φ

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TB051-PWUF-xx-LF

SERIES

LEADFREE
02~24WAY
FLANGE
UP
SCREW WIRE
MALE

DESCRIPTION: