
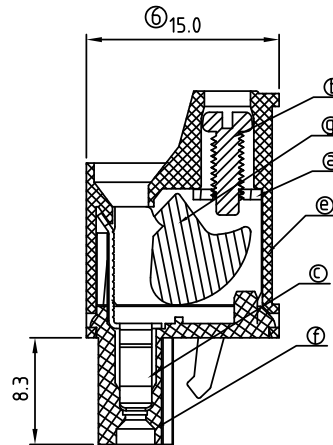
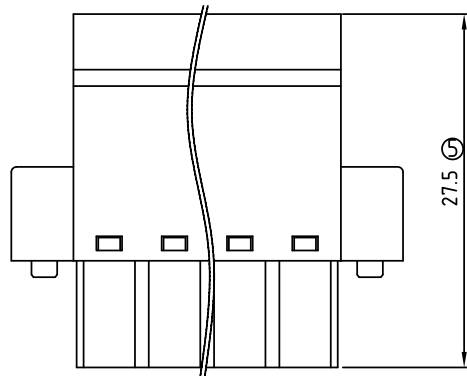



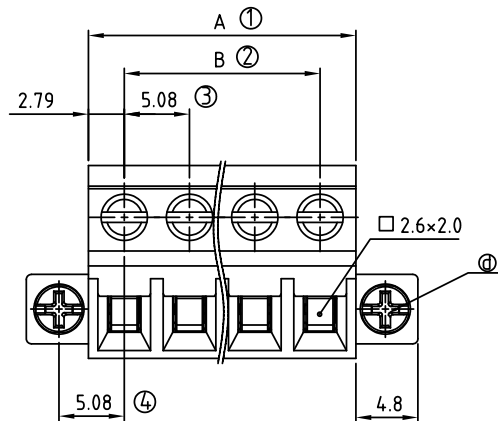

Material

- Item a Clamp: Steel zinc plated.
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz Tin plated
- Item d With flange screw: Steel zinc plated M2.5 "+" slot type
- Item e Terminal (Up body): Thermoplastic (UL94V-0)
- Item f Terminal (Down body): Thermoplastic (UL94V-0)
- Item g Clampage: Steel Zinc plated
- △ Electrical cULus/TUV
- Voltage rating: 300VAC/300VAC
- Current rating: 20A/20A
- Wire range: 0.34-2.5mm²
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5Lb-In / 0.4Nm
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety approval: cULus TÜV

POLE		2	3	4	5	6	7	8	9	10	11	12
A		10.66	15.74	20.82	25.90	30.98	36.06	41.14	46.22	51.30	56.38	61.46
B		5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88
Tol.	±0.20						±0.25					
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	66.54	71.62	76.70	81.78	86.86	91.94	97.02	102.10	107.18	112.26	117.34	122.42
B	60.96	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84
Tol.	±0.30						±0.40					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBH051-SHF-xx-LF

SERIES

LEADFREE

02~24WAY

FLANGE

H TYPE

FEMALE

DESCRIPTION: