
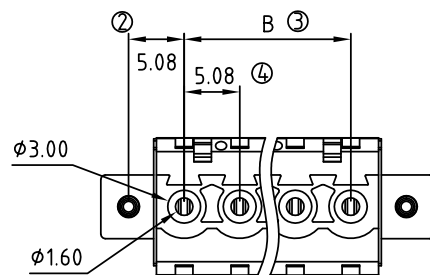
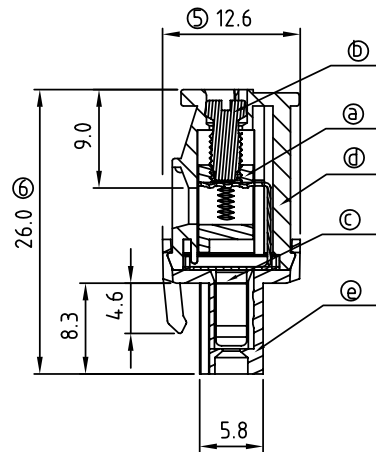


Material

- Item① Clamp: Brass(CuZn), Ni plating
- Item② Terminal screw: Steel Cr3+ Zinc plating "-" slot type
- Item③ Female contact: PhBz, Tin plated
- Item④ Terminal up body: Thermoplastic (UL94V-0)
- Item⑤ Terminal down body: Thermoplastic (UL94V-0)
- Item⑥ With flange screw: Steel Zinc plating M2.5 "+/-" slot type

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 15A/17A/15A
- Wire range: 2.5mm /0.34-2.5mm²
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 3.5Lb-In./0.5Nm/0.4Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety approval:

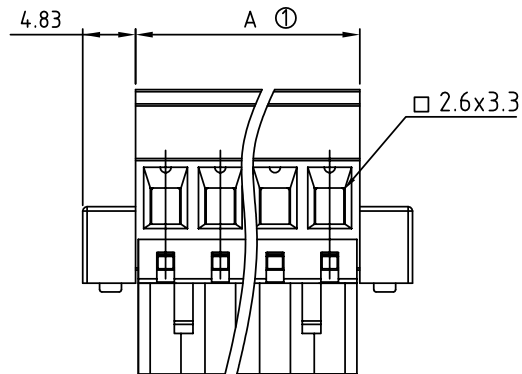

N = Number of poles
Dim A=Nx5.08+0.5
Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH051-SVAF-xx-LF

SERIES

LEADFREE
02-24WAY
FLANGE
UPPER KEY
SCREW 180°
FEMALE

DESCRIPTION: