

Technical Data:

Material:




- Contact(metal housing): Brass (CuZn)
- Terminal screw: Steel zine plating "--"slot type
- Surface of soldertail: Brass with Tin plated
- Insulator (housing): Thermoplastic(UL94V-0)

Electrical


- Voltage rating: 300V
- Current rating: 10A
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wrie range:
- SOLID WIRE(AWG): 16-26
- Stranded wire(AWG): 16-26
- Wire strip length: 6~7mm
- Withstanding Voltage:1.6kv

Mechanical:

- Operating temperature: -30°C to +105°C
- Soldering reliability: 245°C±10°C/5 Sec

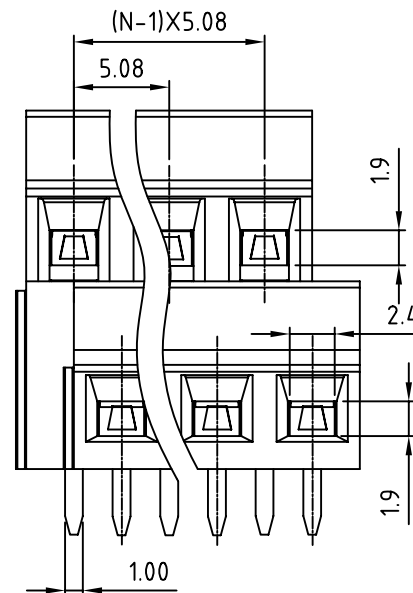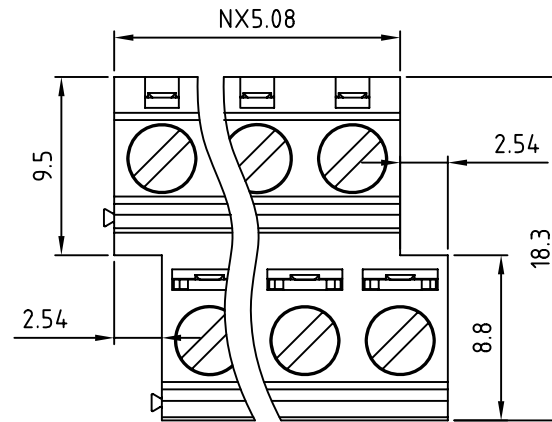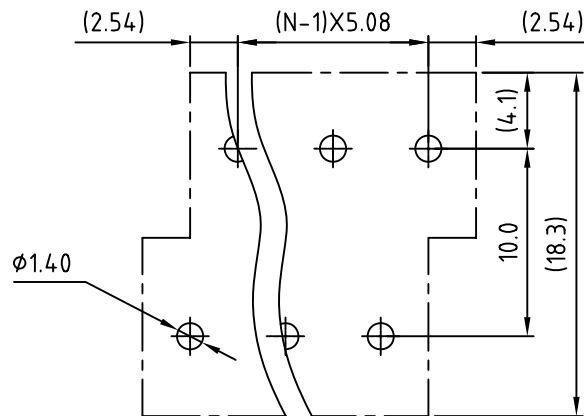

N=Number of contacts

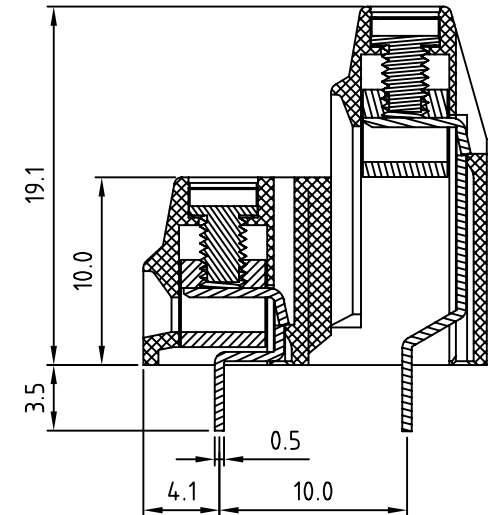

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBH051B1-D10R-xx-LF

SERIES

DIP 180°

R TYPE FOOT

LEADFREE

02 PER ROW:04 PIN

24 PER ROW:48 PIN

HIGH 10.0mm

DESCRIPTION: