
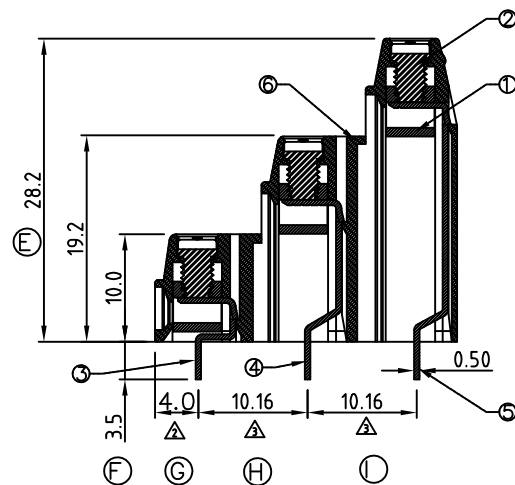
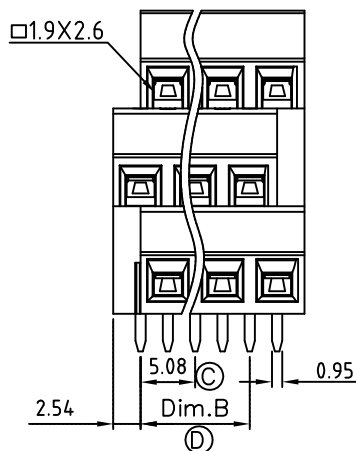
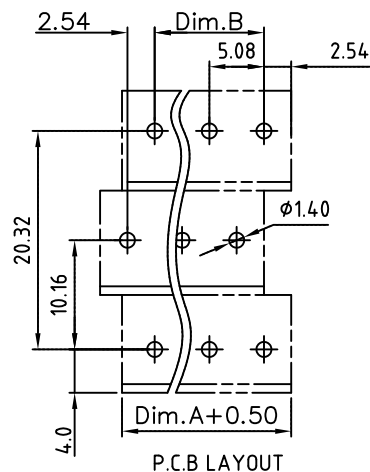


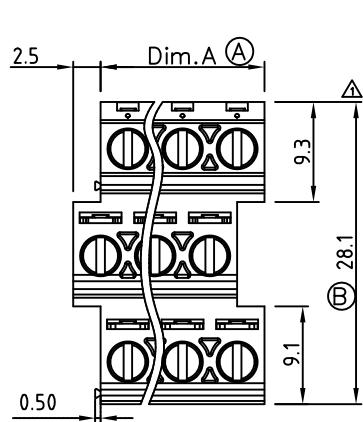

Material

Terminal body

- Item 1 (metal housing): Brass(CuZn): Ni plated
- Item 2 Terminal screw: Steel Zinc plating "-" slot type
- Item 3 Solder pin : Brass , Tin plated (Short)
- Item 4 Solder pin : Brass , Tin plated (Middle)
- Item 5 Solder pin : Brass , Tin plated (Long)
- Item 6 Insulator (housing): Thermoplastic (UL94V-0)

- Electrical cULus
- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24

- ▲ Torque(Lb-In): 3.5
- Screw: M3.0
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- ▲ Soldering temperature: 250°C±10°C/5 Sec

Safety Approval: us

N=Number of contacts

Dim.B = (N-1)x5.08

Dim.A = Nx5.08

Poles Dim	3x2P- 3x7P	3x8P- 3x12P	3x13P- 3x18P	3x19P- 3x24P
Dim.B	±0.15	±0.20	±0.25	±0.30
Dim.A	±0.20	±0.25	±0.30	±0.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBH051C1-D10R-xx-LF

SERIES

DIP 180°

HIGH 10.0mm

LEADFREE
POS PER ROW
02:02 WAY
24:24 WAY
R TYPE FOOT

DESCRIPTION: