
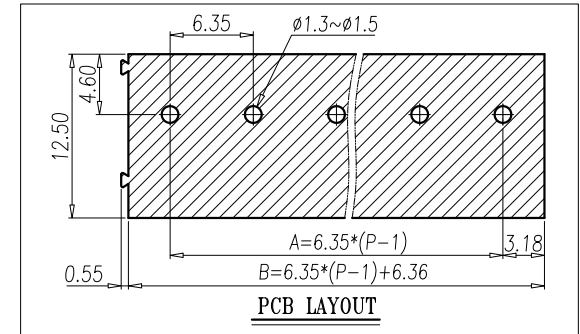


NOTES 1:

UL Standard :

- 1.Rating: 300V 30A
- 2.Insulation Withstands Voltage:
AC 1500V at 1 minute
- 3.Using Temperature Range:
-40°C~+115°C
- 4.Screw Torque Value:0.8N·m
- 5.Suitable Electric Wire:AWG 26~10


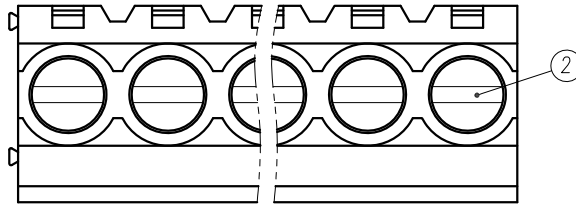


IEC Standard:

- 1.Rating: 450V 32A
2. Rate Impulse Voltage: 6000V
- 3.Insulation Resistance:
500MΩ or more at DC500V
- 4.Material Group : I
5. Pollution Degree : 2
- 6.Overtoltage Category: III
- 7.Using Temperature Range:
-40°C~+120°C
- 8.Screw Torque Value: 0.5N·m
- 9.Suitable Electric Wire: 0.2~4mm²

NOTES 2:

1. RoHS Compliance
- 2.Strip Length:8~9mm
- 3.Pole sizes 13~24 are assembled housing

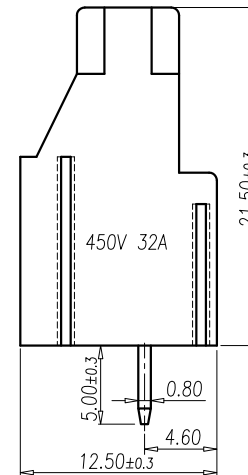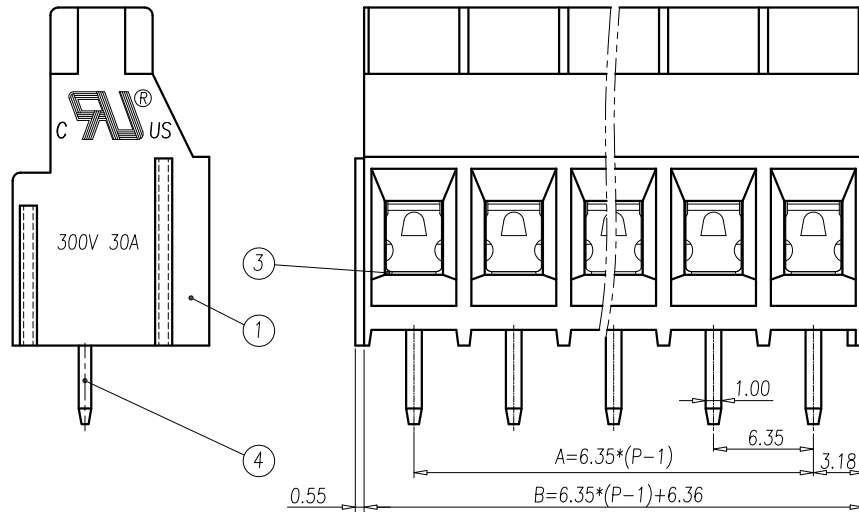

P	2	3	4	5	6	7	8	9	10	11	12	13
A	6.35	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20
B	12.71	19.06	25.41	31.76	38.11	44.46	50.81	57.16	63.51	69.86	76.21	82.56
P	14	15	16	17	18	19	20	21	22	23	24	
A	82.55	88.90	95.25	101.60	107.95	114.30	120.65	127.0	133.35	139.70	146.05	
B	88.91	95.26	101.61	107.96	114.31	120.66	127.01	133.36	139.71	146.06	152.41	

4	SOLDER PIN	COPPER ALLOY	Tin Plated
3	WIRE CAGE	STEEL	M3/Zn Plated
2	SCREW	STEEL	M3/Zn Plated
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH063-D21-xx-LF

SERIES

LEADFREE
02~24WAY
HIGH 21.5mm
DIP 180°

DESCRIPTION: