

Technical Data:

Material:

- Contact(metal housing): Brass Machined(option)
- Terminal screw: Steel galvanized and chromitized
- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 20 Amps/way max
- Contact resistance: 20mΩ(max)
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 12~30AWG


Mechanical:

- Torque: 4kgf.cm/M3
- Operating temperature: -30℃ to +105℃

DIMENSION


A	NX7.5
B	(N-1)X7.5

Poles	Tolerance
2pole~5pole	±0.08
6pole~10pole	±0.15
11pole~15pole	±0.20
16pole~24pole	±0.30

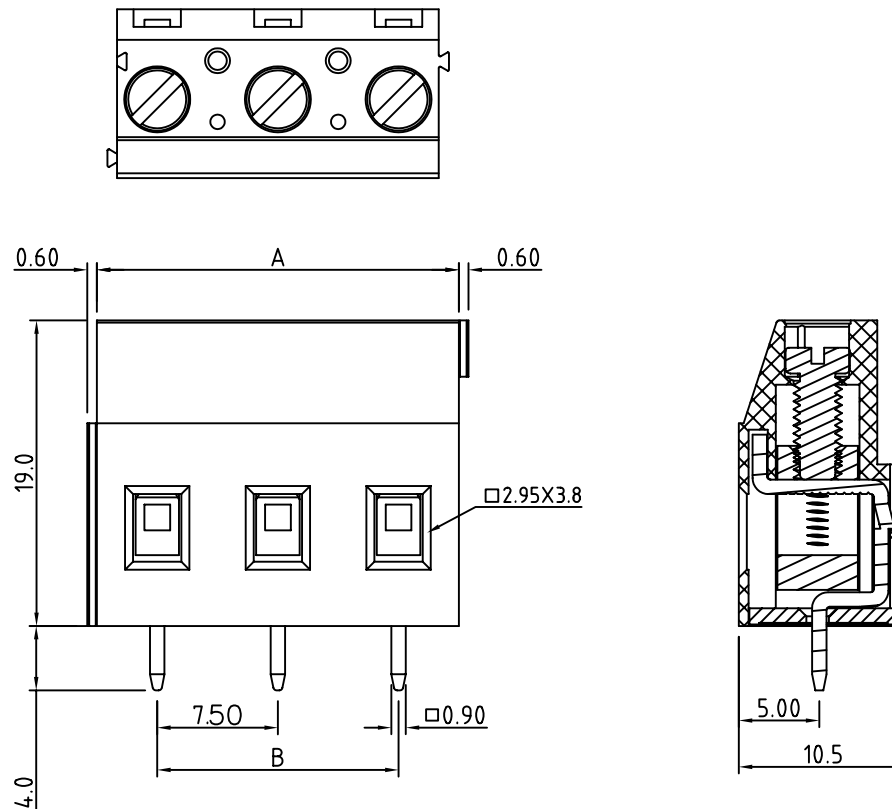

N=Number of contacts

P.C.B LAYOUT

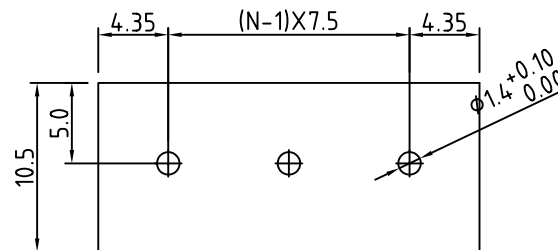

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH075-D19-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 19.0mm

DIP 180°

DESCRIPTION: 7.5mm SERIES 180°