
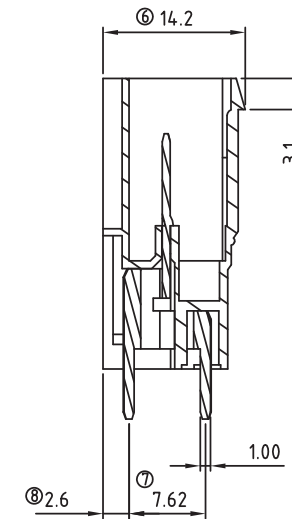
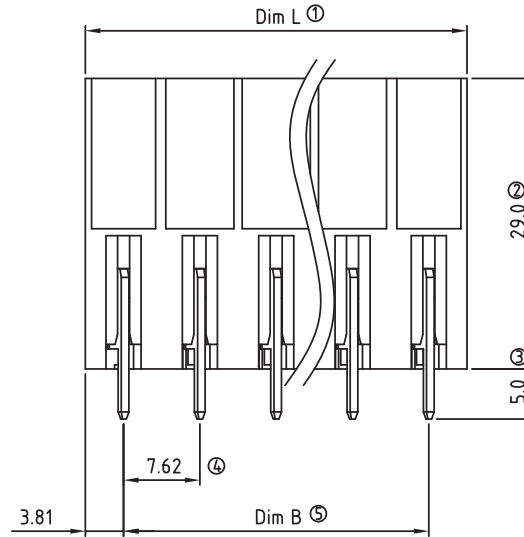
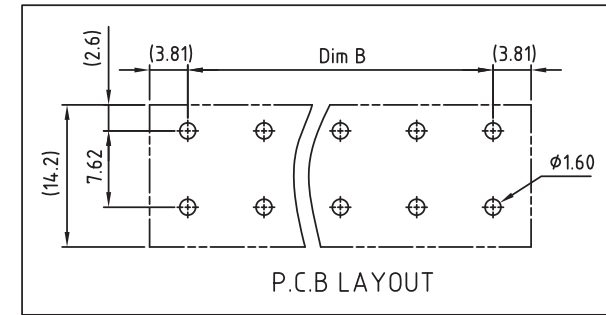


Material

- Terminal body(Contact pin) : Brass with Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- | | | |
|--------------------------|-------------------|------|
| | cULus | IEC |
| ● Voltage rating: | 300V | 400V |
| ● Current rating: | 32A | 20A |
| ● Withstanding Voltage: | 1.6KV | 6KV |
| ● Operating temperature: | -40°C to +115°C | |
| ● Soldering temperature: | 250°C± 10°C/5 Sec | |
| ▲ Safety Approval: | us | |

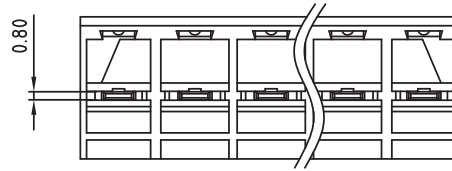

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	99.06
Dim B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44
TOL	±0.20				±0.25				±0.30			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	106.68	114.3	121.92	—	—	—	—	—	—	—	—	
Dim B	99.06	106.68	114.3	—	—	—	—	—	—	—	—	
TOL	±0.30											

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBH076-PDC29-xx-LF

SERIES

LEADFREE
02-24WAY
HIGH 29.0mm
CAGE
DIP 180°
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: