

DimA=(N-1)×7.62+5.6
 DimB=(N-1)×7.62
 N=Number of contacts



POLES	DIM A	DIM B
2p-6p	+0 -0.20	±0.15
7p-11p	+0 -0.40	±0.30
12p-16p	+0 -0.60	±0.45

Material


- Ltem 1 Insulating body Thermoplastic (UL94V-0)
- Ltem 2 Insulating body Thermoplastic (UL94V-0)
- Ltem 3 Terminal screw Steel Zinc plating "-" slot type
- Ltem 4 Terminal body(house) Brass, Ni plated
- Ltem 5 Wire guard PhBz (CuSn) Tin plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 4.3 Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

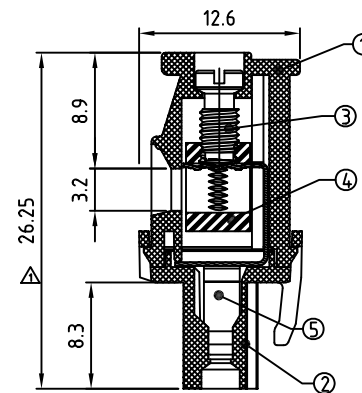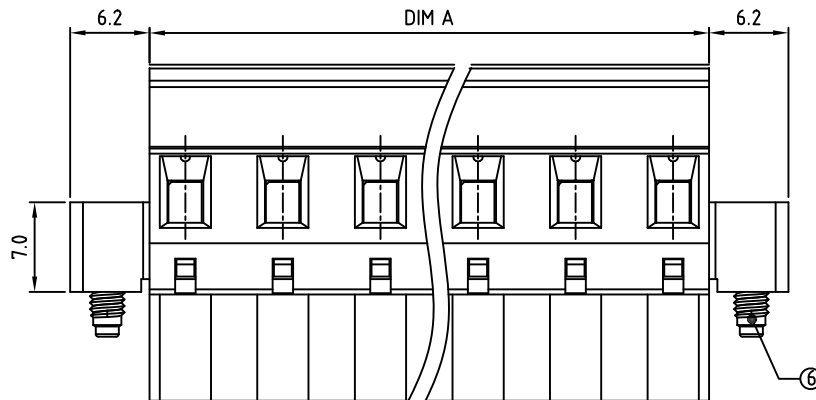

SECTION A-A

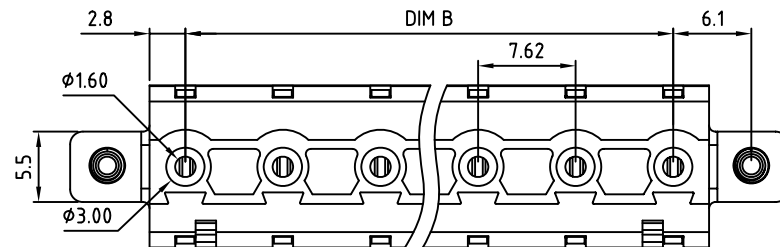

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH076-SVBF-xx-LF

SERIES

LEADFREE
 02~16WAY
 FLANGE
 BOTTOM KEY
 SCREW 180°
 FEMALE

DESCRIPTION: 7.62 Series (2-16p) hook on back side