
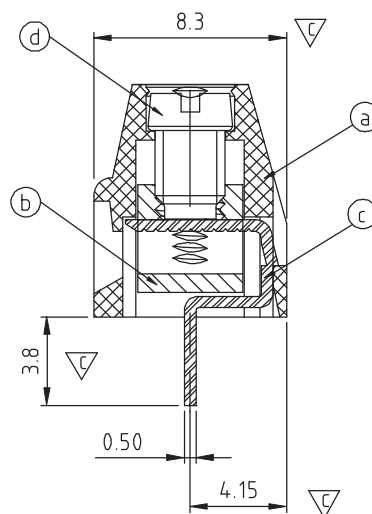


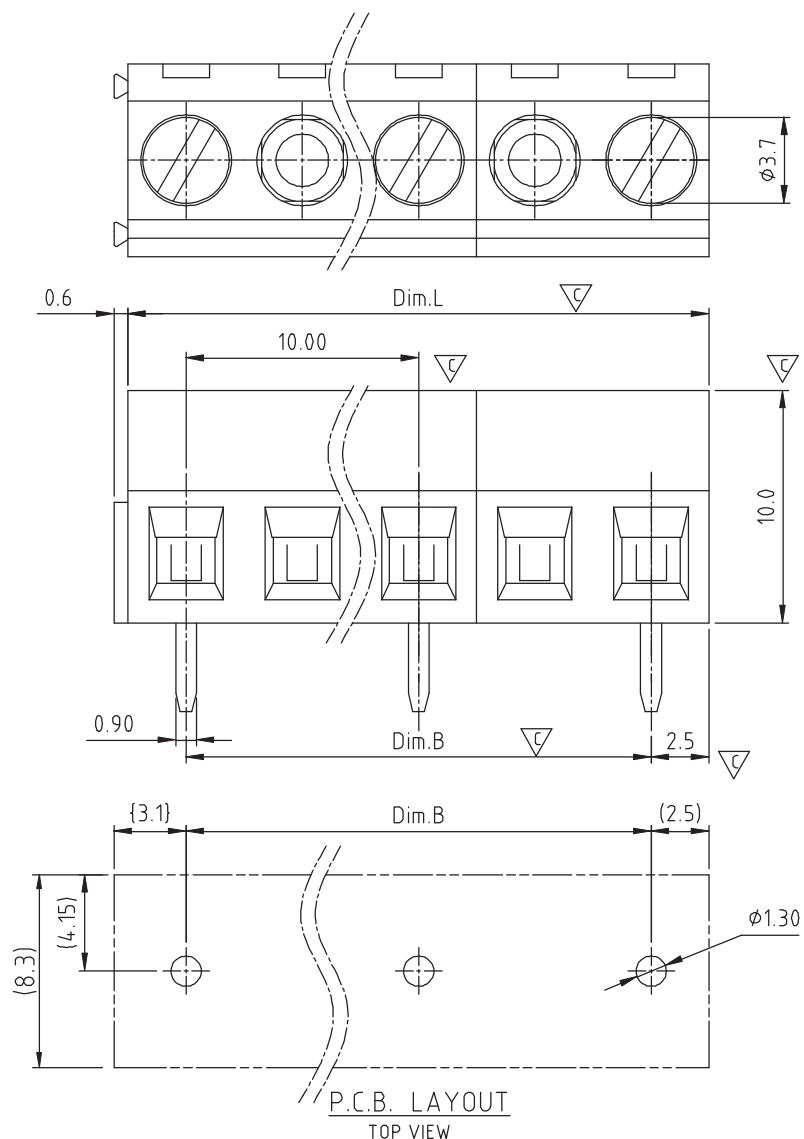

Material:

- Item ① Terminal housing: Thermoplastic (UL 94V-0)
- Item ② Clamp: Brass ,Ni plated
- Item ③ Wire guard solder pin: Brass ,Tin plated
- Item ④ Terminal screw: Steel Zinc plating"-slot type

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-26
- Stranded wire(AWG): 16-26
- Torque: 3.5Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: us
- Critical dimension:

Poles	02	03	04	05	06	07	08	09	10	11	12
Dim L	15.00	25.00	35.00	45.00	55.00	65.00	75.00	85.00	95.00	105.00	115.00
Dim B	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00
TOL	±0.25					±0.35					

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


TOLERANCES ARE

X: ± 0.50
.X: ± 0.30
.XX: ± 0.10
.XXX: ±
ANG: ± 1°

PPOJECTION

照片框

ORDER INFORMATION

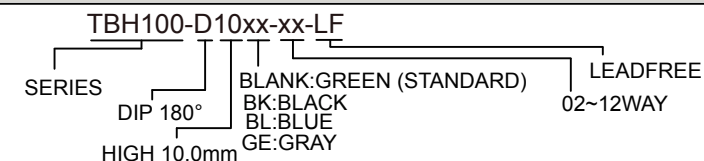

DESCRIPTION: