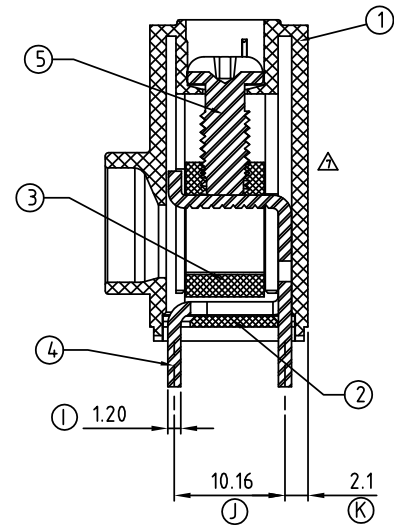
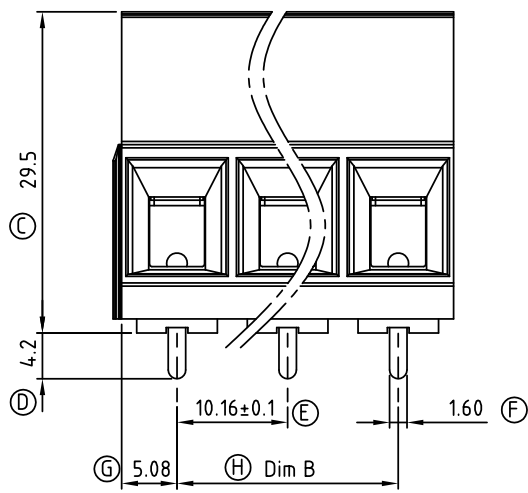
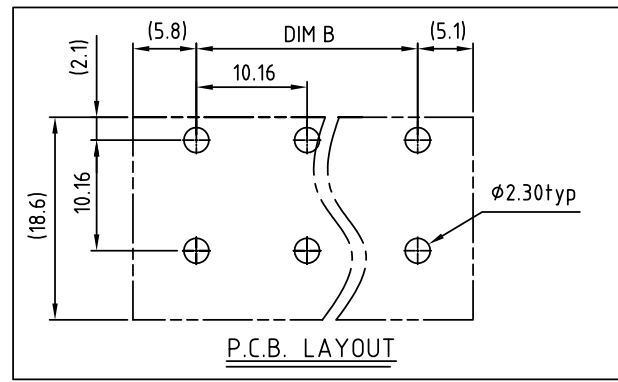
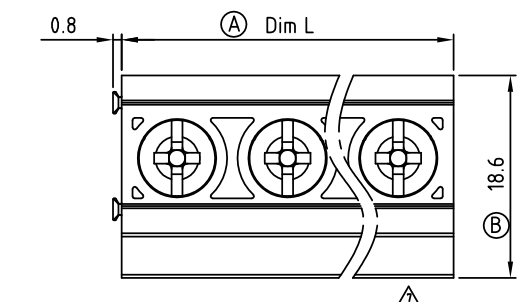


Material:

- Item 1 Terminal housing: Thermoplastic (UL 94V-0)
- Item 2 Terminal cover: Thermoplastic (UL 94V-0)
- Item 3 Clamp: Zinc alloy . Ni plated
- ⚠ ● Item 4 Wire guard solder pin: Copper .Tin plated
- Item 5 Terminal screw: Steel Zinc plating"/+/-"slot type

Electrical

- ⚠ ● Voltage rating : 600V
- ⚠ ● Current rating : 64A
- Wire range :
 - Solid wire (AWG) : 6-22
 - Stranded wire (AWG) : 6-22
- ⚠ ● Torque (LB-In.) : 19
- Screw : M4.5
- Wire strip length : 11-12mm
- Withstanding voltage : 1.6KV
- Operating temperature : -40°C+115°C
- Soldering temperature : 250°C+10°C/5 Sec
- ⚠ ● Safety Approval: us

Poles	02	03	04	05	06	07	08	09	10	11	12
Dim L	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76	121.92
Dim B	10.16	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44	101.60	111.76
TOL	±0.25					±0.40					

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH101-D29B-xx-LF

SERIES
LEADFREE
02~12WAY
2 ROW
HIGH 29.5mm
DIP 180°

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com