

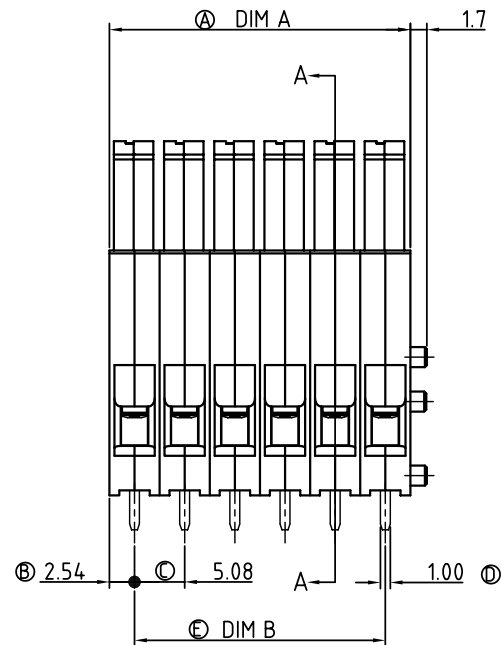


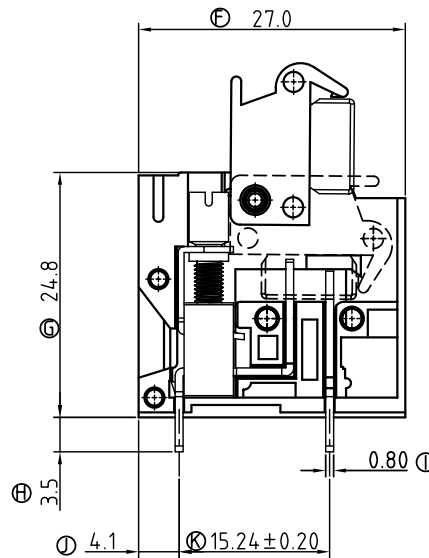

P.C.B LAYOUT

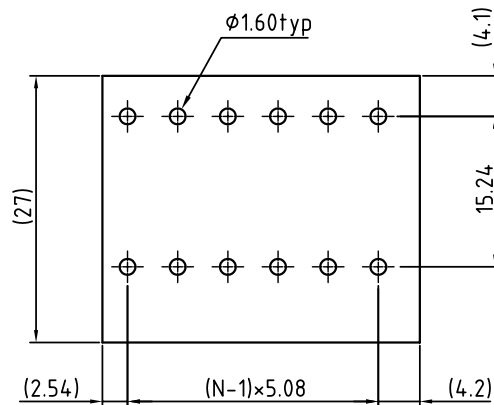


SECTION A--A

Dimension

DIM A	N x 5.08
DIM B	(N - 1) x 5.08

N=Number of poles

POLES	TOL
2p-6p	± 0.50
7p-12p	± 0.60
13p-16p	± 0.70
17p-24p	± 0.80



Technical Data:

Material:

- Terminal Body (metal housing) : Brass(CuZn)
- Terminal screw : Steel Zinc plating "-" slot type.
- Contacts : Brass
- Surface of solder tail : Tin plated
- Insulator (housing) : Thermoplastic (UL94V-0)
- Electrical:
- Voltage rating : 300V
- Current rating : 15A
- Wire range :
- Solid wire (AWG) : 12-28
- Stranded wire(AWG) : 12-28
- Torque(Lb-In) : 3.5
- Screw : M3
- Wire strip length : 8~9mm
- Withstanding Voltage : 1.6KV
- Operating temperature : -40°C+115°C
- Soldering temperature : 250°C+10°C/5 Sec

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBHX051-R24-xx-LF

SERIES

LEADFREE
02~24WAY
HIGH 24.8mm
DIP 90°

DESCRIPTION: