
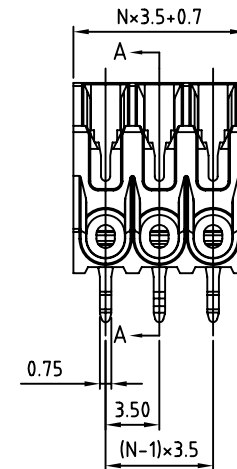


Material:


- Item ① Contact pin: Brass(CuZn) Tin plated
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ Wire guard: Stainless steel

Electrical: cULus



- Voltage rating: 500V
- Current rating: 2A
- Wire range:
- Push-Wire Connection: AWG 16-20 "sol" ①
- Wire strip length: 7.5-8.5mm
- IDC Connection: AWG 20 "sol" ②
- Withstanding Voltage: 2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C ±10°C/5 Sec



N=Number of Contacts

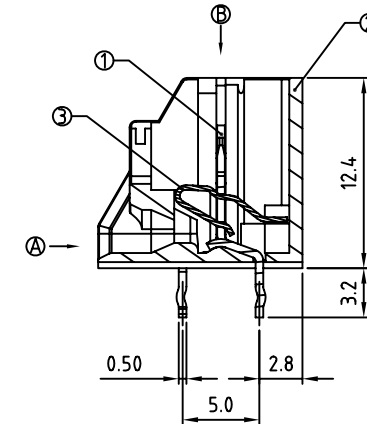

SECTION A-A

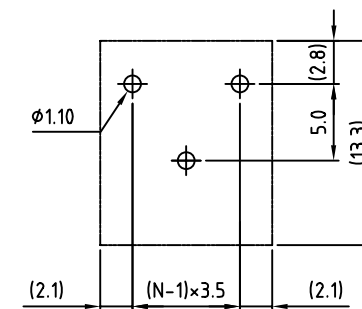

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBI035-D12R-xx-LF

SERIES
LEADFREE
02~24WAY
R TYPE FOOT
HIGH 12.4mm
DIP 180°

DESCRIPTION: