

SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0)

GREEN

TERMINALS: TIN PLATED BRASS

SCREWS: ZINC PLATED STEEL

WIRE RANGE AWG: 16-22 STR





RATING: 10AMPERES.250 VAC

INSULATION WITHSTANDS VOLTAGE AC 2000V

INSULATION RESISTANCE 500 Ω OR MORE AT DC 500V

FEATURES

SUPPLY 3P CAN BE DOVETAILED TOGETHER TO
MAKE ANY LENGTH & DIFFERENT COMBINATIONS

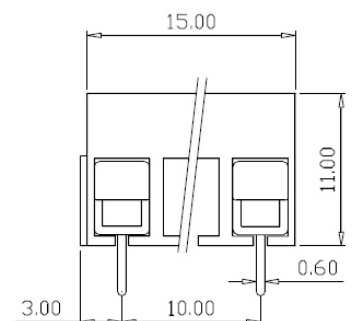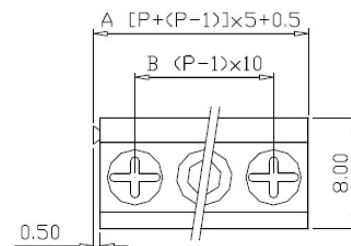

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	15.5	25.5	35.5	45.5	55.5	65.5	75.5	85.5	95.5	105.5	115.5	125.5	135.5	145.5
B	10	20	30	40	50	60	70	80	90	100	110	120	130	140
POLE	16	17	18	19	20	21	22	23	24	25	26	27		
A	155.5	165.5	175.5	185.5	195.5	205.5	215.5	225.5	235.5	245.5	255.5	265.5		
B	150	160	170	180	190	200	210	220	230	240	250	260		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

TBN050-D11EE-xx-LF

SERIES

LEADFREE
02~27WAY
EMPTY EVEN PIN
HIGH 11.0mm
DIP 180°

DESCRIPTION: